

Opal Pty Ltd

Botany Paper Mill – EPL Compliance August 2020 Quarterly noise monitoring report



3 September 2020

Doc no. 16002-QM-RP-17-0

Opal Pty Ltd
Botany Paper Mill - EPL Compliance

Title	August 2020 quarterly noise monitoring report
Document no.	Doc No. 16002-QM-RP-17-0
Revision	Rev 1
Date	3 September 2020
Author	Scott Hughes
Reviewer	John Hutchison
File name	16002-QM-RP-17-0 Quarterly Monitoring Report - August 2020.docx

Hutchison Weller Pty Ltd
ABN 34 603 174 518
102/1-3 Gurrigal Street
Mosman NSW 2008

www.hutchisonweller.com

Table of Contents

1.	Introduction	4
1.1	Background	4
1.2	Objective	4
1.3	Operational noise limits	4
2.	Existing environment	6
2.1	Monitoring limitations	6
2.2	Receiver locations	6
3.	Operational noise monitoring	9
3.1	Method.....	9
3.2	Monitoring results.....	11
3.3	Comparison with previous monitoring surveys	12
4.	Summary	17

Glossary

Acoustic and vibration related terms:

- **Acoustic Spectrum:** A representation of a sound sample (usually short term) of the amount of energy or sound level per frequency.
- **Ambient Noise:** Ambient noise encompasses all sound present in a given environment, being usually a composite of sounds from many sources near and far.
- **dB(A):** A unit of sound measurement which has frequency characteristics weighted so that it approximates the response of the human ear to sound waves
- **Heavy Vehicle:** A truck, transport or other vehicle with a gross vehicle weight above a specified level (for example: over 8 tonnes)
- **L_{A90}:** Is the noise level that is exceeded 90 per cent of the measurement time. This parameter is commonly referred to as the background noise level
- **L_{Aeq}:** Noise level that represents the energy average noise from the source during a specified time period, and is the equivalent continuous sound pressure level for a given period
- **L_{Aeq(15hr)}:** The Leq noise level for the period from 7 am to 10 pm.
- **L_{Aeq(9hr)}:** The Leq noise level for the period from 10 pm to 7 am.
- **NCA:** Noise Catchment Area. Grouping dwellings or receivers together in terms of similar noise environment.
- **Noise barrier:** Generally a wall or an earth mound that obstructs or restricts the passage of sounds waves from a noise source
- **Noise Logger:** A data logging (data and audio in some cases) which records noise. Usually used for unattended noise monitoring of background or ambient noise.
- **NML:** Noise Management Level as detailed in the NSW Interim Construction Noise Guideline. The NML is the noise goal for construction activities.
- **Octave Bands:** Sounds that contain energy over a wide range of frequencies are divided into sections called bands. A common standard division is in 10 octave bands identified by their center frequencies 31.5, 63, 250, 500, 1000, 2000, and 4000 Hz
- **RBL:** Rating Background Level is the overall single figure background level representing each assessment period over the whole monitoring period. The RBL is used for determining the appropriate construction noise criteria.
- **RNP:** Road Noise Policy (OEH, 2011)
- **Sound Level Meter:** An instrument consisting of a microphone, amplifier and data analysis package for quantifying and measuring noise.
- **Sound Power Level (L_w):** Sound power level or acoustic power level is a logarithmic measure of the sound power in comparison to a specified reference level.
- **Sound Pressure Level (SPL or L_p):** The level of noise, usually expressed in dB(A), as measured by a standard sound level meter.

1. Introduction

1.1 Background

OPAL operates a paper mill at its Botany site in Sydney, NSW. The paper mill is subject to operational noise conditions set out in the Ministers Conditions of Approval (MCoA) (including subsequent modifications) and the Environment Protection Licence (EPL) No. 1594.

As part of the EPL, there is a requirement to undertake quarterly monitoring at receivers surrounding the site to show compliance with set noise limits. This report covers the August 2020 – October 2020 quarter. At the time of monitoring, the B9 paper machine was operating at typical production capacity but was shut during the following periods:

- 5 August from 2:55am to 5 August 10:00pm
- 8 August from 8:18am to 14 August

1.2 Objective

This report addresses operational licence conditions relating to measurements of the quarterly monitoring of the noise environment around the Opal site, i.e. Condition M6.1 and M6.2 of EPL 1594. These require:

- M6.1 The licensee must undertake noise monitoring at least once every three months to check compliance with the noise limits specified in Condition L4.1.
- M6.2 All monitoring required by this licence must be undertaken in accordance with Australian Standard 2659.1 – 1998: Guide to the use of sound measuring equipment – Portable sound level meters, or any revisions of that standard which may be made by Australian Standards Authority, and the compliance monitoring guidance provided in the NSW Industrial Noise Policy.

1.3 Operational noise limits

Operational noise limits for the new Opal Paper Mill are detailed in condition L4.1 of EPL 1594 and Condition 10 of the MCoA. These have been replicated in **Table 1**.

Since the inception of the monitoring program dating back to as early as 2012, the same receiver locations have been used. This last noise monitoring survey only had access to 5 locations with the residence located at R3 (Murrabin Avenue) no longer available for access. A suitable alternative location is currently being investigated.

Table 1 Operational noise limits

ID	Location	Day L _{Aeq,15min} , dB(A)	Evening L _{Aeq,15min} , dB(A)	Night L _{Aeq,15min} , dB(A)	Night L _{Amax} , dB(A)
R1	Corner of McCauley Street and Australia Avenue	46	45	43	55
R2	Australia Avenue	45	45	43	55
R3*	Murrabin Avenue*	46	45	43	55
R4	Partanna Avenue	42	41	41	55
R5	Corner of Partanna Avenue and Moorina Avenue	42	42	39	55
R6	Moorina Avenue	43	43	39	55

*Receiver location no longer accessible

Regular quarterly monitoring surveys have demonstrated that direct measurement of Opal's contribution to the noise environment is not possible because their noise emissions are generally lower than the ambient measured L_{Aeq} noise levels, which masks the actual noise from the Opal site.

Ambient noise levels measured at the receiver locations using the L_{Aeq} noise parameter are therefore not a true representation of noise from the Opal site but a combination of influences from all local noise sources.

The influence from Opal on the local noise environment may be better described using the L_{A90} statistical parameter. This additional parameter has been presented in the results summary to be considered in conjunction with the L_{Aeq} noise level when assessing compliance of the Opal site.

During the night time periods fewer extraneous noise influences are present providing lower overall noise levels in the area. Under these conditions constant noise sources such as Opal operations are more likely to be apparent in the background noise levels noting that the emission levels from the site remain relatively constant throughout the day, evening, and night time.

Maximum noise levels from the site are also captured under the EPL requiring a cap on noise emissions of L_{Amax} 55 dB(A) at all locations during the night time period. An L_{Amax} parameter for the monitoring period simply records the loudest noise level measured during the night time assessment period and does not distinguish the source of noise.

Maximum noise events are not generally observed from the Opal site unless equipment has broken down or maintenance activities are underway and neither of these scenarios reflect normal operation of the plant.

Maximum noise levels recorded during these surveys are, therefore, more representative of the broader noise environment which makes the distinction between external sources and Opal's emissions difficult. Furthermore, maximum noise levels measured during the monitoring surveys often, if not always, exceed the maximum noise limit from the site hindering the identification of Opal's contribution.

The addition of the L_{A1} noise level statistic is proposed in conjunction with the L_{Amax} parameter to compliment the maximum noise profile and provide a better representation of environmental noise influences.

An L_{A1} noise level above the night time criteria would not necessarily indicate an exceedance of the Opal noise goals however, long term measurements of this parameter may be useful in identifying changes to the local noise profile which can then be compared to any changes in functional operation within the Opal site.

2. Existing environment

The site is located at the boundary of an industrial area bounded by residential properties located to the north and east of the site, as illustrated in Figure 2-1. The local noise environment beyond the Opal boundary varies throughout the day depending on the contribution of sources including trucks on Botany Road, aircraft, port noise, local business activities on McCauley Road, and local traffic movements.

Noise emissions from the paper mill do not vary significantly as the operation of the plant has been demonstrated to be consistent and reliable.

The source of maximum noise level events in the area are typically from the local road network and aircraft fly-overs. The nature of the processes within the Opal site means that there are typically no maximum noise level events associated with production activities. The exception to this may occur when equipment is not functioning properly during a breakdown or during maintenance activities, both of which are not common scenarios.

The influence of weather conditions on noise levels are apparent as seasonal variations which are forming data trends in the long-term monitoring for the local area.

2.1 Monitoring limitations

Total measured noise levels at monitoring locations are only partly due to Opal site operations. The local noise environment has been a feature of the area for many years. Direct monitoring of Opal noise emissions over this time has demonstrated that specific contribution from Opal cannot be provided with any certainty due to the influence of other audible noise sources adjacent to the site.

2.2 Receiver locations

The EPL specifies six locations for quarterly monitoring. These are illustrated in Figure 2-1 and described further in **Table 2**. The receiver at R3 is not currently being monitored due to access restrictions.



Figure 2-1 Site location and compliance monitoring locations

Table 2 Description of monitoring locations

Monitoring location	Description
R1	This location has a large degree of acoustic shielding from local noise sources due to the development of a warehousing facility on the corner of McCauley Avenue and Australia Avenue. The noise environment at this location is heavily influenced by traffic on McCauley Street, Perry Street and Beauchamp Road. Local industrial noise from Raymond Avenue is also audible during the day and night time.
R2	This receiver is located opposite the bottom apex of the Purcell Park on Australia Avenue. At this location the residents have a clear line of sight to the paper mill. Noise walls have less effectiveness for the residences due to the large separation distances. Noise from port activities also has less shielding from the Opal site. Background noise levels are heavily dominated by road traffic noise from all sources.
R3*	This receiver is located adjacent to Purcell Park on Murrabin Avenue. At this location the residents have a partial line of sight to the paper mill although they are located closer to the boundary noise wall than receivers at R2. Noise from port activities are partially shielded by the Opal site. Background noise levels are heavily dominated by road traffic, aircraft and industrial noise from all surrounding sources.
R4	The receivers at Partanna Avenue are physically closest to the Opal site but have the benefit of significant shielding of operational activities from the noise barrier located on the northern boundary. Road traffic noise contributes to background noise for this receiver. Some construction work was in progress at the park adjacent to the property during the monitoring period.
R5	Furthest location from the Opal site, a higher degree of influence from Botany Road, Bunnerong Road and the port. Noise from the Opal site is generally inaudible at this location although significant noise from the Opal site has been observed here during adverse meteorological conditions.
R6	In this location receivers are well shielded from operational noise from the Opal site due to the presence of the noise barrier and No. 8 paper machine building. Noise levels at this location are heavily influenced by local bird colonies, port noise, traffic on Botany road and traffic on Bunnerong Road. Construction of industrial units on the adjacent vacant land (Hanger block) is well underway at the time of writing this report.

*Receiver location currently unavailable

3. Operational noise monitoring

3.1 Method

Operational noise monitoring for the August survey period was completed between 3 August and 10 August 2020, using automatic noise loggers deployed at five representative locations.

Monitoring was performed using Acoustic Research Laboratories brand Ngara Type 1 noise loggers and SVAN 958 SLMs, set to A-weighting, fast-response, and recording noise levels continuously over consecutive 24-hour periods at each location. This survey period coincided with typical continuous operations of paper mill.

Weather conditions during the survey period were obtained from the Automatic Weather Station (AWS) maintained by the Bureau of Meteorology at Sydney Airport. Weather conditions for the monitoring period have been plotted showing daily trends in wind direction and speed which are presented in Figure 3-1.

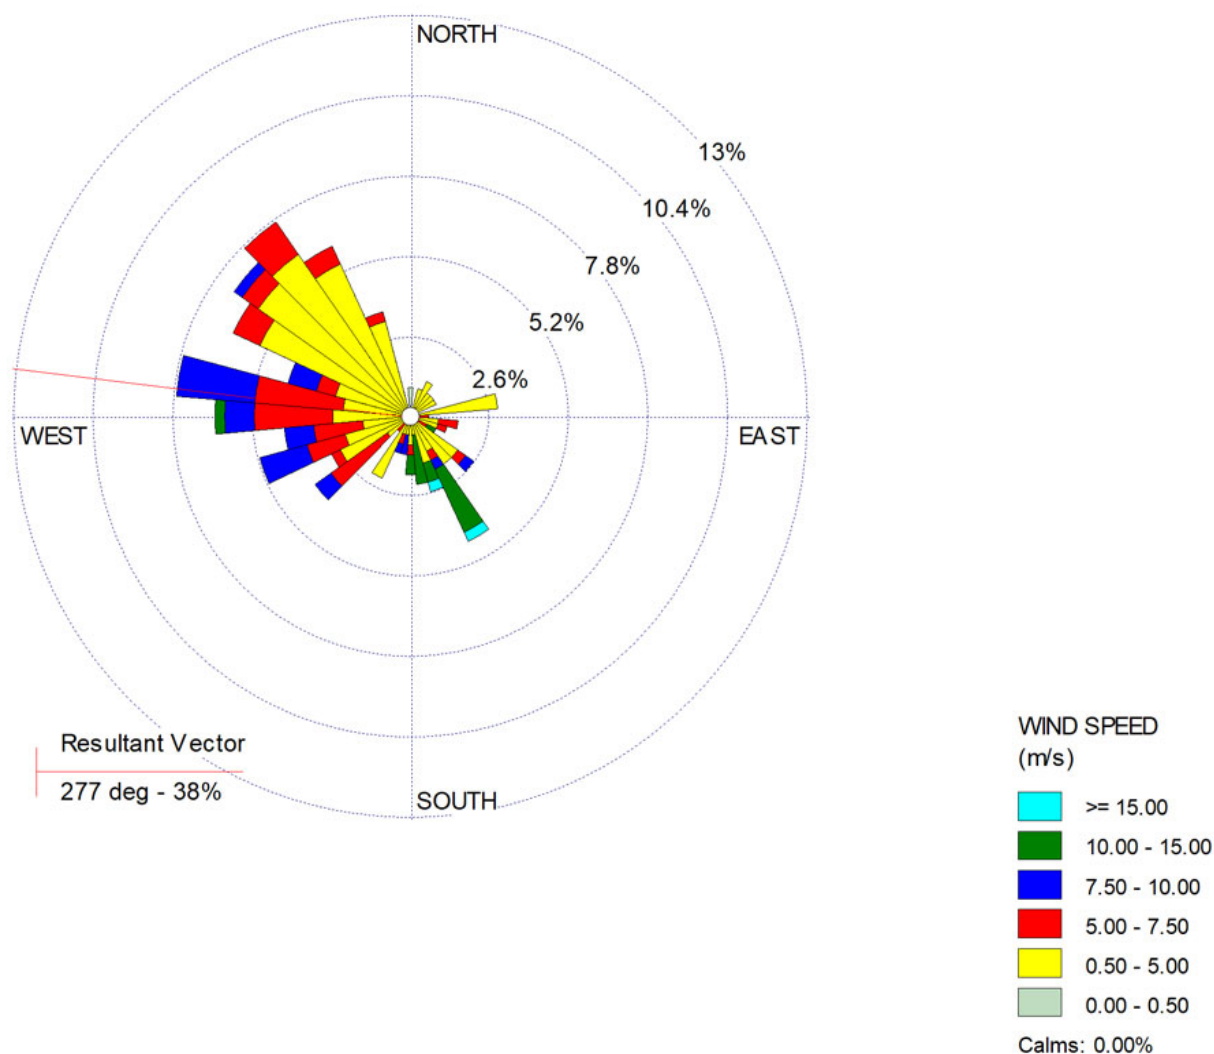


Figure 3-1 Wind speed and direction during monitoring period (3 August – 10 August 2020, source BoM 2020)

The plotted data from the wind rose indicates that for about 65% of the time the wind speeds during the monitoring were between about 0 and 5 m/s (see Figure 3-2) with the overall resultant wind vector for the monitoring period concentrated to the west. Winds from this direction may enhance the influence of the Opal operations on residences directly to the east of the site.

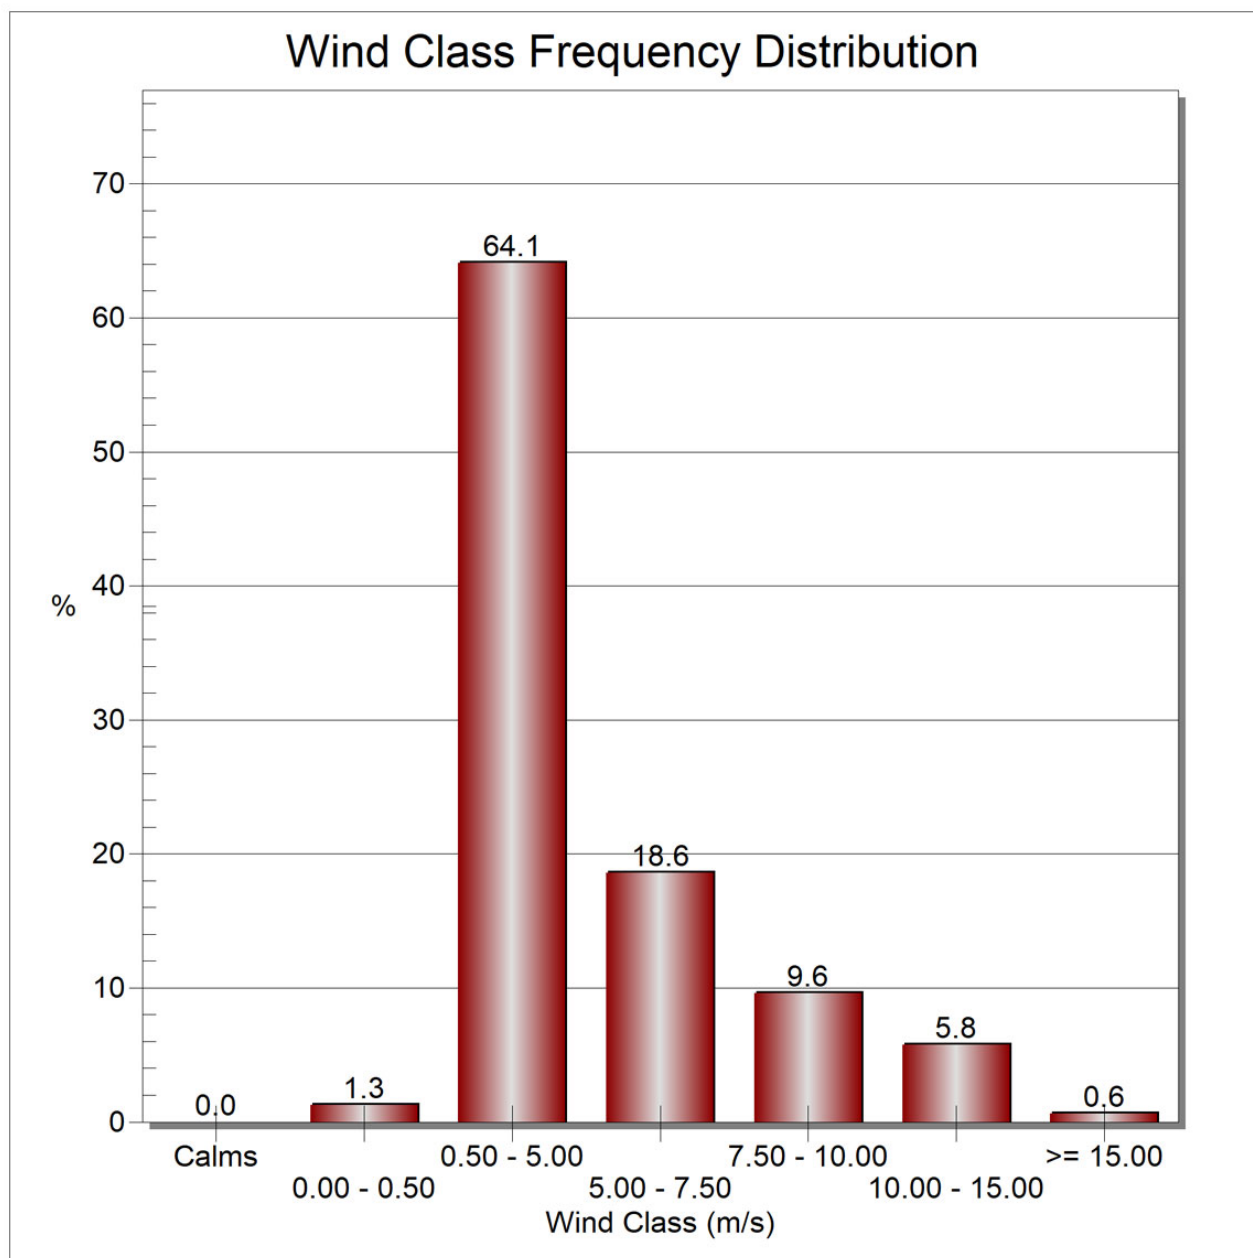


Figure 3-2 Wind speed frequency distribution

Wind blowing from around the westerly direction during the August noise monitoring survey may tend to enhance noise levels from sources to west of the residences including the Opal site for residences in Partanna and Moorina Avenues. About 40% of the time winds from the east to the south were observed. Wind from this quadrant would tend to increase overall noise levels in the residential areas from Botany Road and Port Botany operations.

3.2 Monitoring results

The reported L_{Amax} , L_{A1} , L_{Aeq} , and L_{A90} noise levels are summarised from several days of monitoring and are affected by all noise sources in the local area such as road traffic, loud short-term noise (birds), aircraft, and local industry and heavy vehicle movements.

During the August 2020 quarterly noise survey, the paper mill had a planned shut-down from the 5th starting at 2:55am until 10:00pm on the same day. This shut down period accounts for the whole of the daytime and evening periods for that day. A second unplanned shut-down occurred from the 8th and ran until the end of the monitoring period.

During the daytime and evening periods on 5 August when Opal was undergoing the planned shut-down, the following observations of the data trends were made:

- Daytime L_{A90} noise levels were higher than the median values for the other days when Opal was operational. Daytime L_{Aeq} noise levels were similar to median values for the other days when Opal was operational.
- Evening L_{A90} noise levels were at the upper end of the range of noise levels measured for the whole monitoring period. Evening L_{Aeq} noise levels were close to the median range of values levels measured for the whole monitoring period.

These observations indicate that the overall noise environment during the survey did not vary significantly over the monitoring period and therefore the impact of Opal operations on the noise environment was minimal.

During the period from the 8th to the 9th when an unplanned shut down occurred, the following observations of the noise data were made:

- Day, evening and night time L_{A90} and L_{Aeq} noise levels for the 8th of August were lower than the median values for the other days.
- Day, evening and night time L_{A90} and L_{Aeq} noise levels for the 9th of August were generally around the median values for the other days.

These observations were reviewed in light of the wind directions which indicated that on Saturday 8 August, the resultant wind direction was from the north-west which tends to direct noise from Opal operations towards the port area away from residences. During the 9th of August winds from the south east are observed, tending to carry noise impacts from Botany Road and the Port into the nearby residential areas.

In both cases for the planned and unplanned shut-down activities, the L_{Aeq} noise levels exceed the EPL noise goals for each of the assessment periods at all of the survey locations whether the Opal site was operational or shut down.

When compared to other seasonal monitoring results, the measured L_{A90} and L_{Aeq} noise levels from the August 2020 monitoring data are slightly higher than measured noise levels from previous surveys at corresponding times of the year.

Night-time periods were assessed to provide additional information of the paper mill noise contributions using the median L_{A90} noise levels as a benchmark as rating background noise levels provide a good proxy for L_{Aeq} levels from steady state noise emitters.

The most recent round of compliance measurements has been added to the historical data collected during compliance noise surveys, providing about 8 years of seasonal data. This data includes measurements of the noise environment both with the Opal site both operational and shut down for maintenance over this period.

The results of monitoring survey for August 2020 have been graphed and are shown in Appendix A. The parameters of L_{Aeq} and L_{A90} presented in Table 3 are used to provide information for comparison against the project criteria and the background noise environment.

A separate table of L_{Amax} and L_{A1} noise levels has been generated for the recent monitoring survey and in future once sufficient data is acquired, will be graphed to demonstrate data trends for each of the monitoring locations.

3.3 Comparison with previous monitoring surveys

The data in Figure 3-3 and Figure 3-4 provides a chronological progression of the measured noise levels during shutdown and normal operations summarised for monitoring from 2012 to present.

Historical background noise levels from Figure 3-3 and Figure 3-4 are not directly related to the L_{Aeq} criteria from the EPL; however, they provide an indication of the increase in background environmental noise levels corresponding to the regular noise surveys undertaken for the Opal site.

Table 3 Summary of noise monitoring

Time and date	Profile of Noise Environment - Noise Monitoring Location											
	R1		R2		R3		R4		R5		R6	
Daytime: 7:00:00 AM to 6:00:00 PM Date	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq
Monday 3 August 2020	35.7	53.8	39.8	51.9	-	-	42.7	52.9	34.3	75.4	33.7	73.4
Tuesday 4 August 2020	44.4	52.3	46.0	62.7	-	-	43.9	54.2	44.0	52.4	44.5	54.8
Wednesday 5 August 2020	46.6	54.2	49.3	54.8	-	-	46.6	54.5	46.6	53.7	46.7	59.2
Thursday 6 August 2020	43.3	53.2	-	-	-	-	43.7	54.1	40.2	50.7	44.0	59.9
Friday 7 August 2020	45.2	53.8	-	-	-	-	46.1	56.8	41.5	53.9	45.8	54.3
Saturday 8 August 2020	39.8	48.9	-	-	-	-	40.1	54.7	39.4	49.6	40.7	48.6
Sunday 9 August 2020	43.9	54.1	-	-	-	-	45.6	58.2			43.8	54.2
Median	43.9	53.8	46.0	54.8	-	-	43.9	54.5	40.9	53.1	44.0	54.8

Evening: 6:00:00 PM to 10:00:00 PM Date	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq
Monday 3 August 2020	45.2	49.1	51.3	54.5	-	-	46.2	49.7	46.6	49.7	45.0	48.8
Tuesday 4 August 2020	45.3	49.8	50.4	54.1	-	-	47.2	51.7	45.0	49.3	45.5	48.6
Wednesday 5 August 2020	44.9	48.7	-	-	-	-	46.4	50.6	45.0	50.8	44.6	49.4
Thursday 6 August 2020	43.4	48.3	-	-	-	-	44.1	48.1	39.1	44.4	42.9	47.0
Friday 7 August 2020	41.9	54.5	-	-	-	-	43.7	58.3	44.3	56.2	46.9	55.9
Saturday 8 August 2020	41.8	47.4	-	-	-	-	41.4	48.1	38.0	46.9	41.2	46.1
Sunday 9 August 2020	43.2	54.3	-	-	-	-	40.6	54.9	-	-	45.5	56.0
Median	43.4	49.1	50.8	54.3	-	-	44.1	50.6	44.6	49.5	45.0	48.8

Time and date	Profile of Noise Environment - Noise Monitoring Location											
	R1		R2		R3		R4		R5		R6	
Night 10:00:00 PM to 7:00:00 AM Date	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq	L90 (10th Percentile)	LAeq
Monday 3 August 2020	43.3	48.1	48.8	53.4	-	-	44.1	49.2	44.9	49.0	43.3	48.1
Tuesday 4 August 2020	41.5	48.6	47.4	52.9	-	-	43.5	51.9	43.7	52.1	41.3	49.8
Wednesday 5 August 2020	43.3	48.0			-	-	46.4	50.8	45.9	50.3	44.3	48.7
Thursday 6 August 2020	40.6	47.8			-	-	41.8	50.9	38.8	46.0	39.9	44.8
Friday 7 August 2020	39.4	43.6			-	-	41.4	46.0	39.2	43.4	39.1	44.3
Saturday 8 August 2020	41.1	45.1			-	-	43.3	48.9	32.4	42.2	41.0	44.7
Sunday 9 August 2020	45.0	53.0			-	-	46.0	57.0	-	-	44.6	68.1
Median	41.5	48.0	48.1	53.1	-	-	43.5	50.8	41.4	47.5	41.3	48.1

Table 4 Summary of night time maximum noise levels

Time and date	Maximum Noise Environment - Noise Monitoring Location											
	R1		R2		R3		R4		R5		R6	
Date	LMax	LA1	LMax	LA1	LMax	LA1	LMax	LA1	LMax	LA1	LMax	LA1
Monday 3 August 2020	72.4	62.6	78.3	64.3	-	-	76.7	67.1	74	63.7	72.0	68.1
Tuesday 4 August 2020	72.7	62.2	74.9	63.0	-	-	75.9	70.2	80.3	66.9	73.4	61
Wednesday 5 August 2020	74.6	62.7			-	-	81.8	69.4	76.9	62.2	71.6	63.3
Thursday 6 August 2020	80.8	72.5			-	-	81.6	72.5	72.4	63.7	74.1	62.5
Friday 7 August 2020	70	57.7			-	-	73.3	63.5	67.3	56.1	70.4	63.2
Saturday 8 August 2020	67.1	59			-	-	77.3	73.5	70.4	58.8	68.2	56.8
Sunday 9 August 2020	79.8	67.3			-	-	78.1	70.9	-	-	96.6	87.6
Median	72.7	62.6	76.6	63.7	-	-	77.3	70.2	73.2	63.0	72.0	63.2

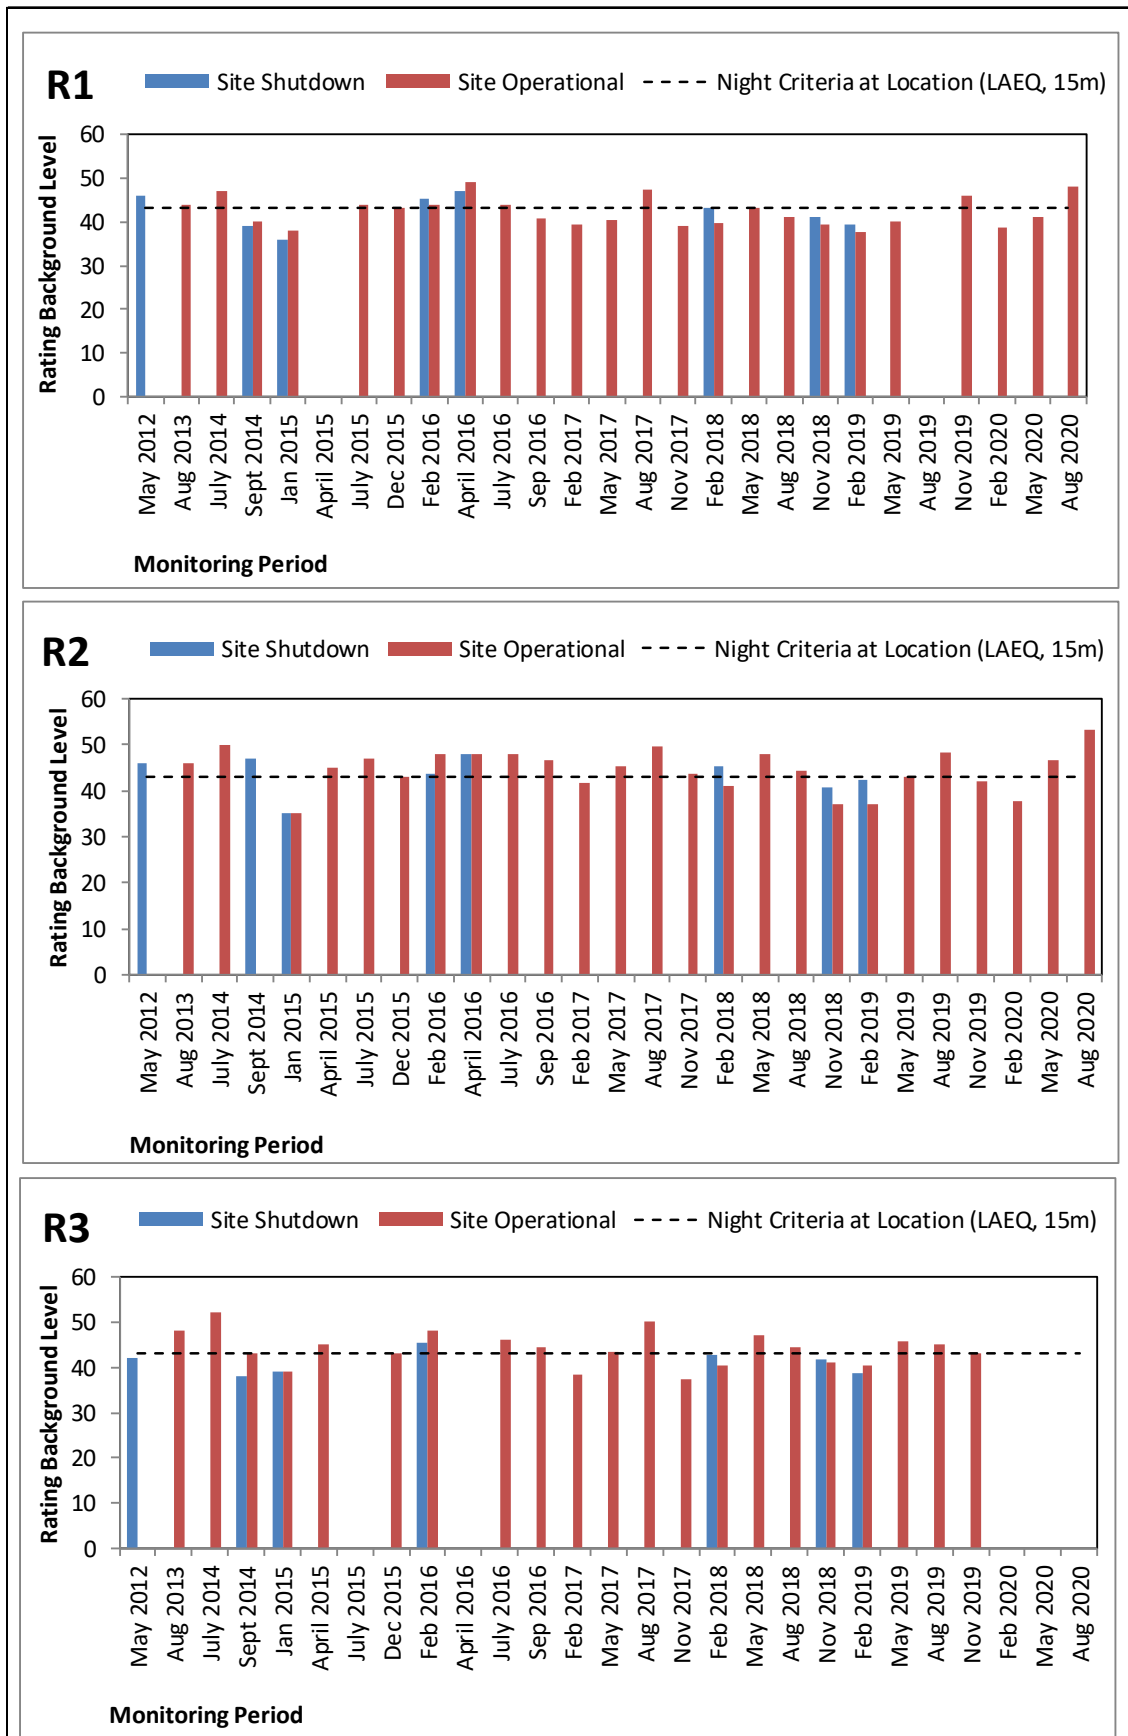


Figure 3-3: Comparison of background noise levels at R1 – R3

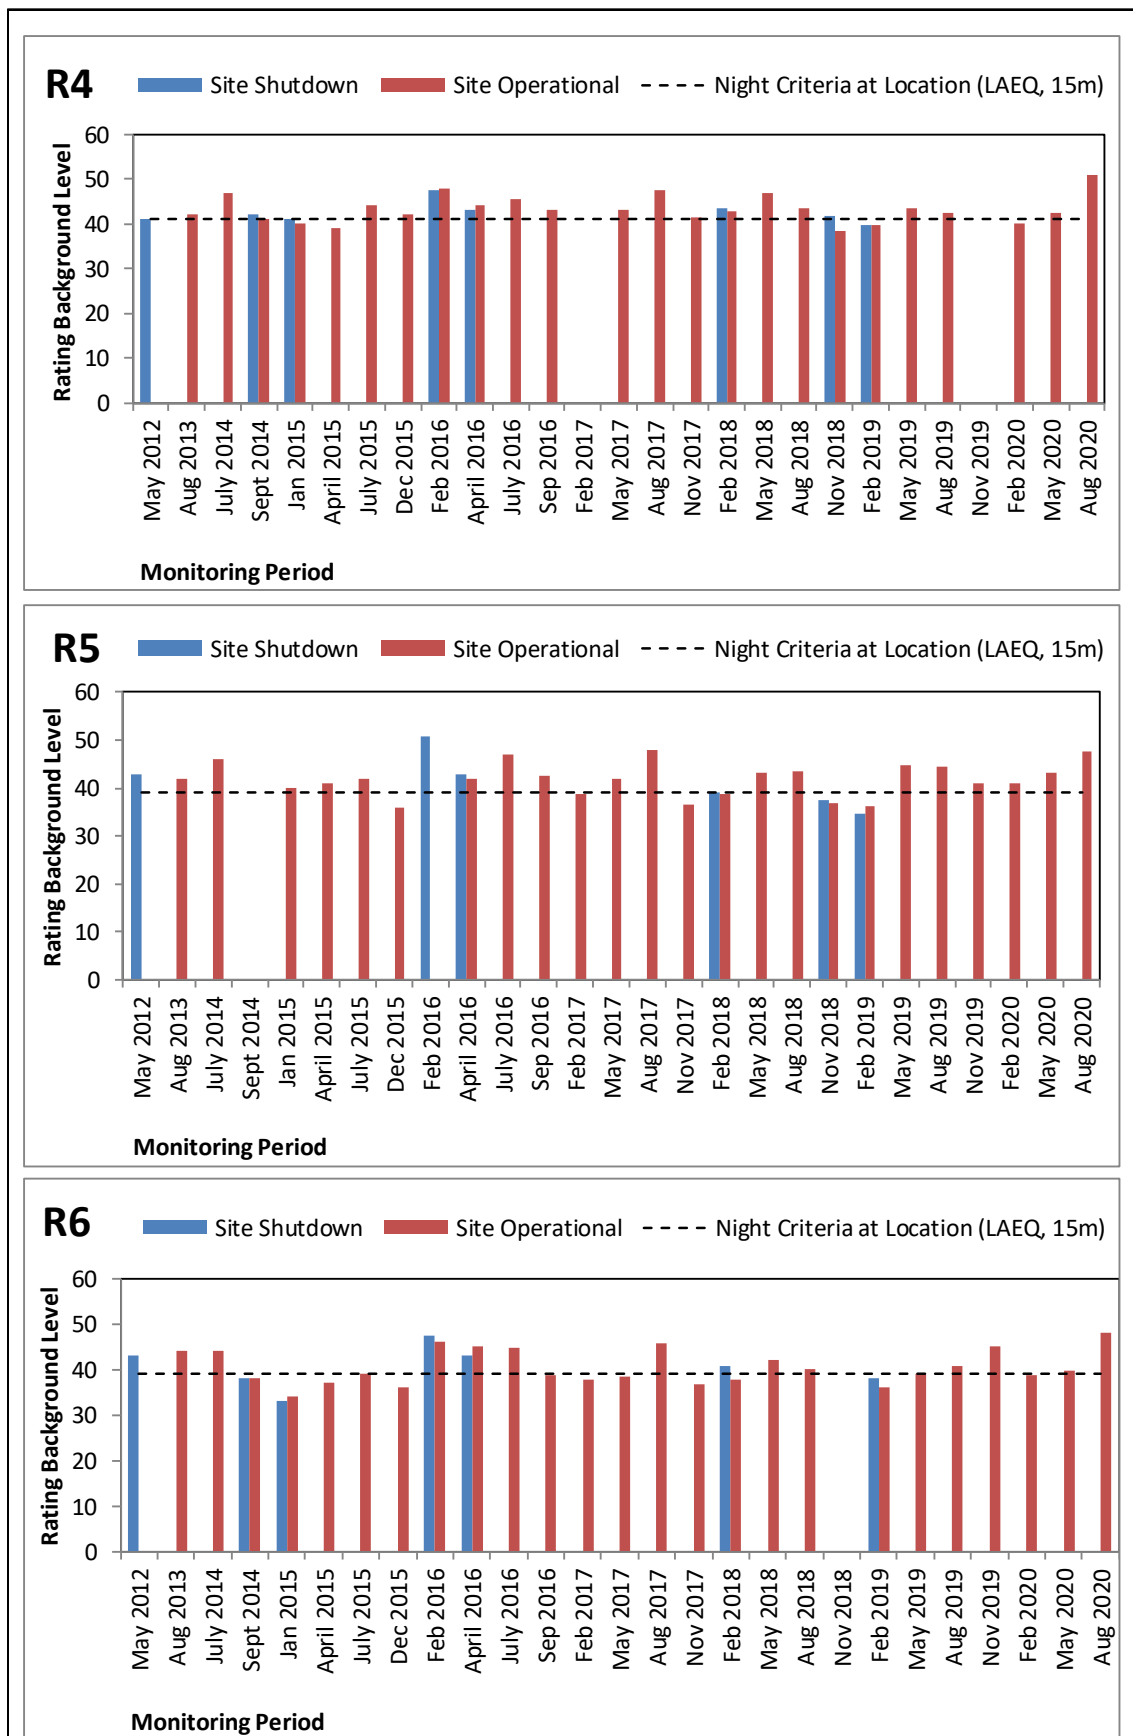


Figure 3-4: Comparison of background noise levels at R4 – R6

4. Summary

In line with earlier noise monitoring surveys, the August 2020 quarterly noise survey demonstrates that the L_{Aeq} measured noise levels in the vicinity of the paper mill exceeded the EPL criteria for day, evening, and night time with or without the Opal site operational.

The maximum recorded noise levels at each monitoring location also exceeded the EPL criteria of 55 dB(A) for this assessment parameter at all receiver locations.


When compared to other seasonal results for similar times during the year, the measured L_{A90} noise levels from the latest monitoring data are typically higher than previous surveys.

In summary the August 2020 quarterly monitoring the following conclusions have been drawn:


- The most recent noise monitoring results indicate that the measured L_{Aeq} noise levels are higher than the L_{Aeq} criteria and higher than the long-term series of data for corresponding seasonal measurement periods.
- The L_{Amax} and L_{A1} for the August noise monitoring demonstrate similar levels to previous surveys.
- The ambient noise environment in the local area is a product of the combined influence of all noise sources within the Port Botany area including the Opal site when operational.
- L_{Aeq} and maximum noise levels recorded during the survey period are generally unrelated to the normal operation of the Opal site.
- The resultant wind vector was from the west. Winds from the south east quadrant occurred for over 40% of the time.
- Wind speeds exceeding 5 ms^{-1} were recorded for less than 35% of the time during the monitoring period.

Appendix A. Noise logger graphs


Profile of Noise Environment - Noise Monitoring Location 1
Monday 3 August 2020

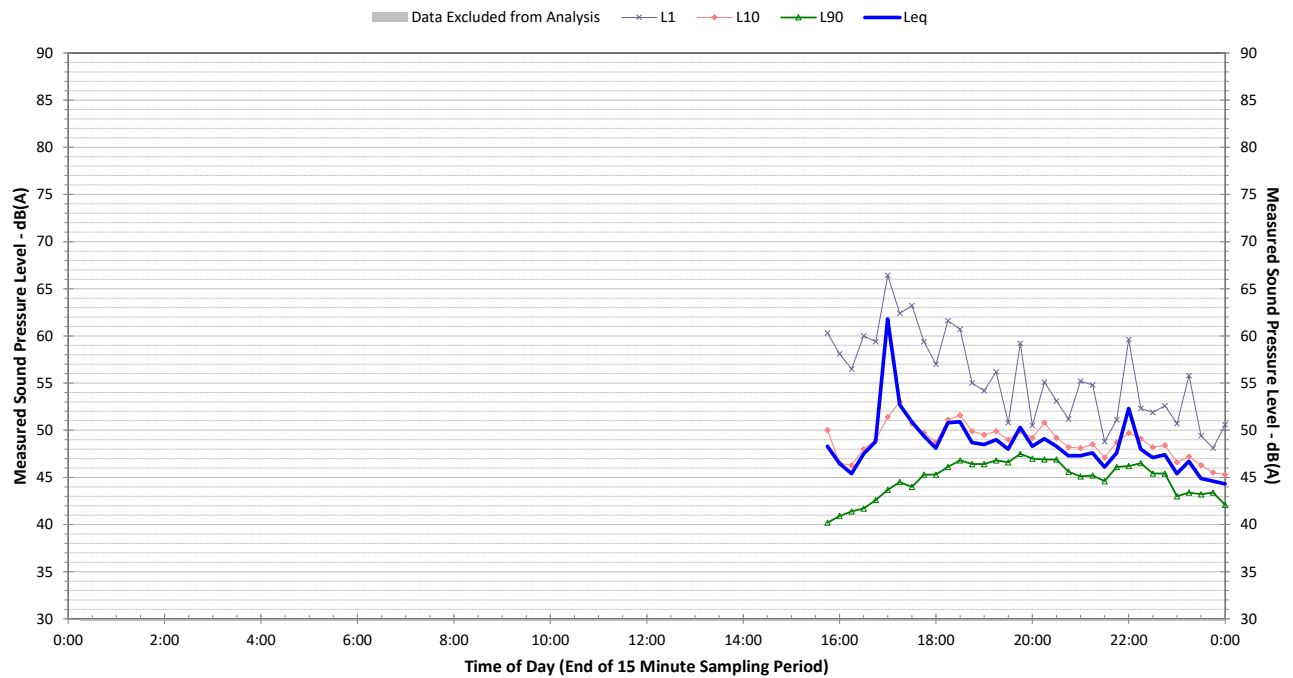


Profile of Noise Environment - Noise Monitoring Location 1
Tuesday 4 August 2020

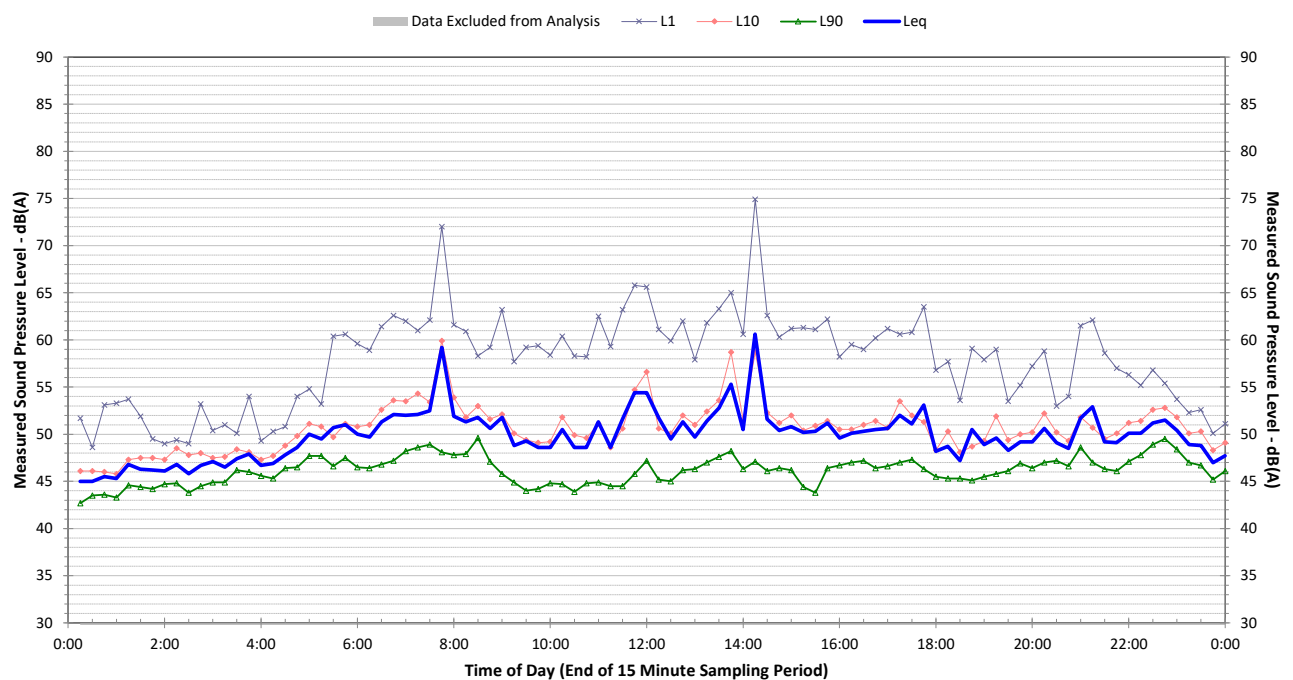


Profile of Noise Environment - Noise Monitoring Location 1 Wednesday 5 August 2020

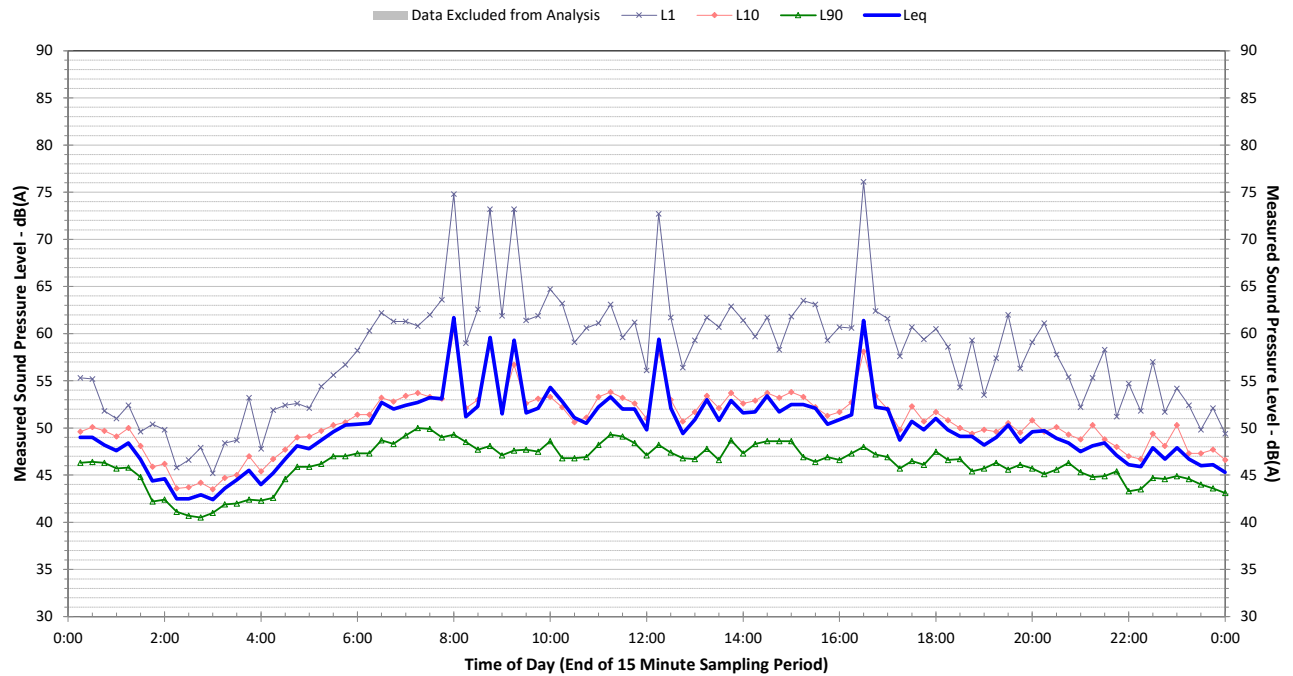


Profile of Noise Environment - Noise Monitoring Location 1 Thursday 6 August 2020

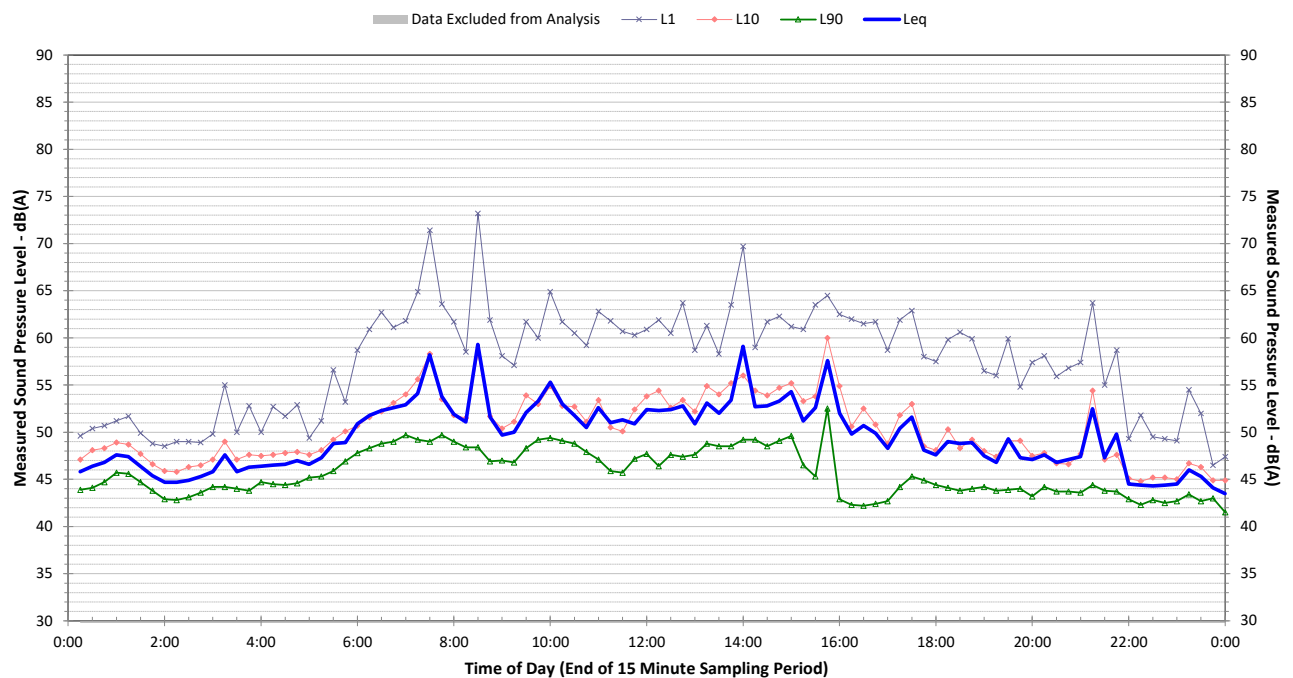


Profile of Noise Environment - Noise Monitoring Location 1 Friday 7 August 2020

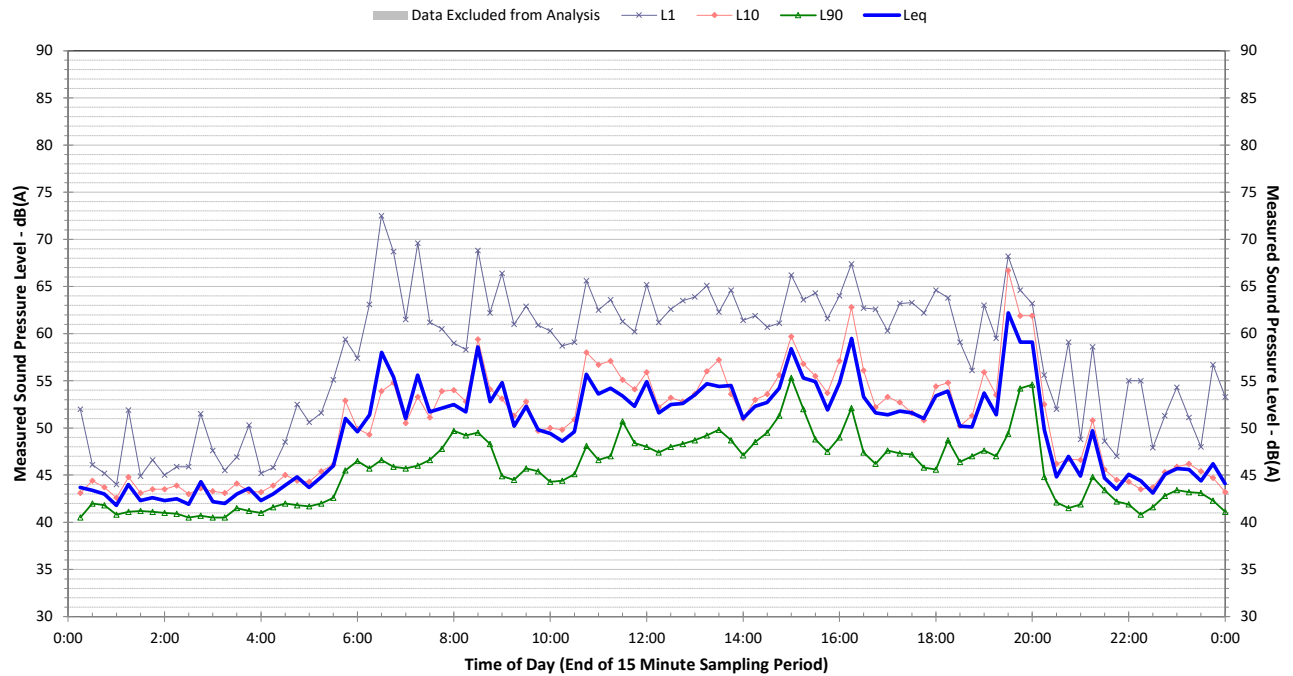


Profile of Noise Environment - Noise Monitoring Location 1 Saturday 8 August 2020

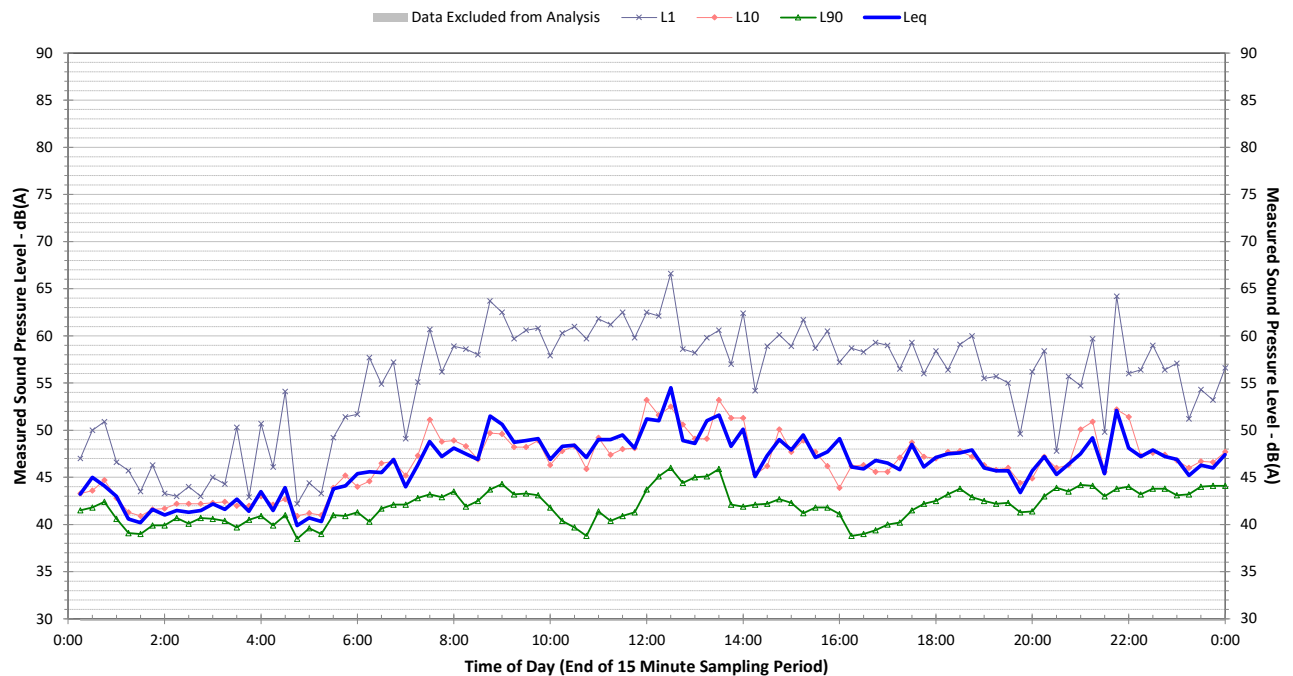


Profile of Noise Environment - Noise Monitoring Location 1 Sunday 9 August 2020

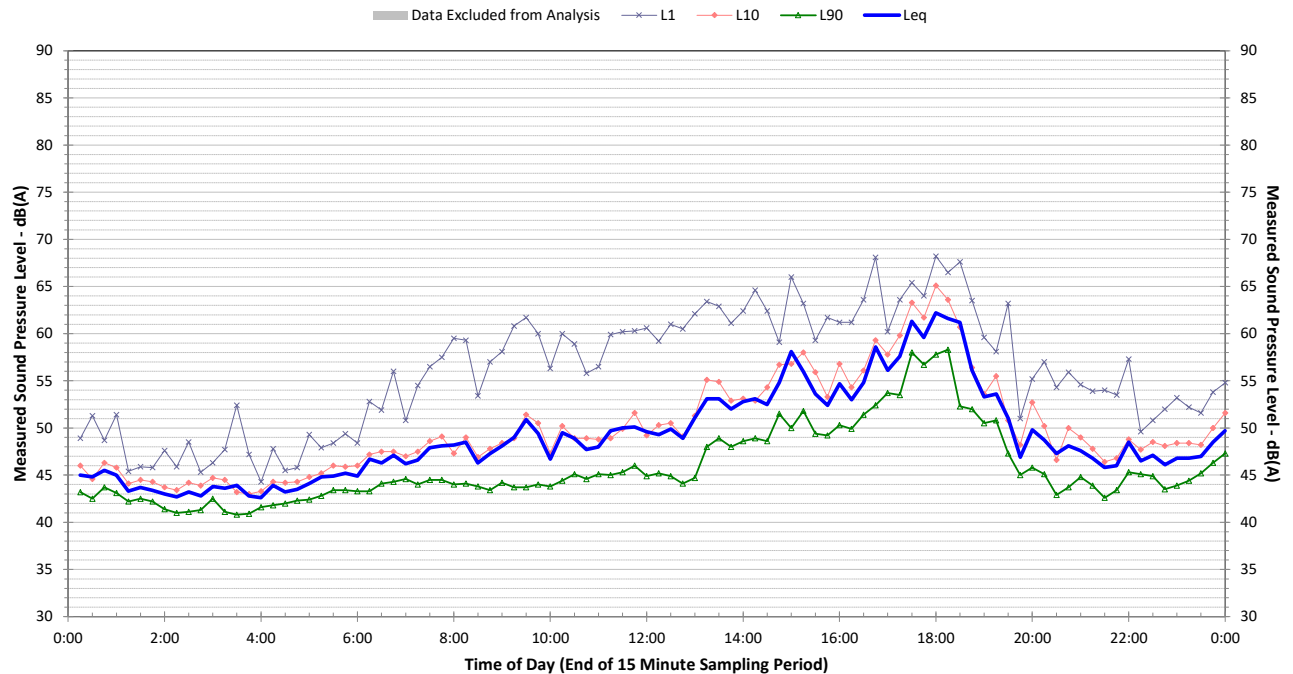


Profile of Noise Environment - Noise Monitoring Location 1 Monday 10 August 2020

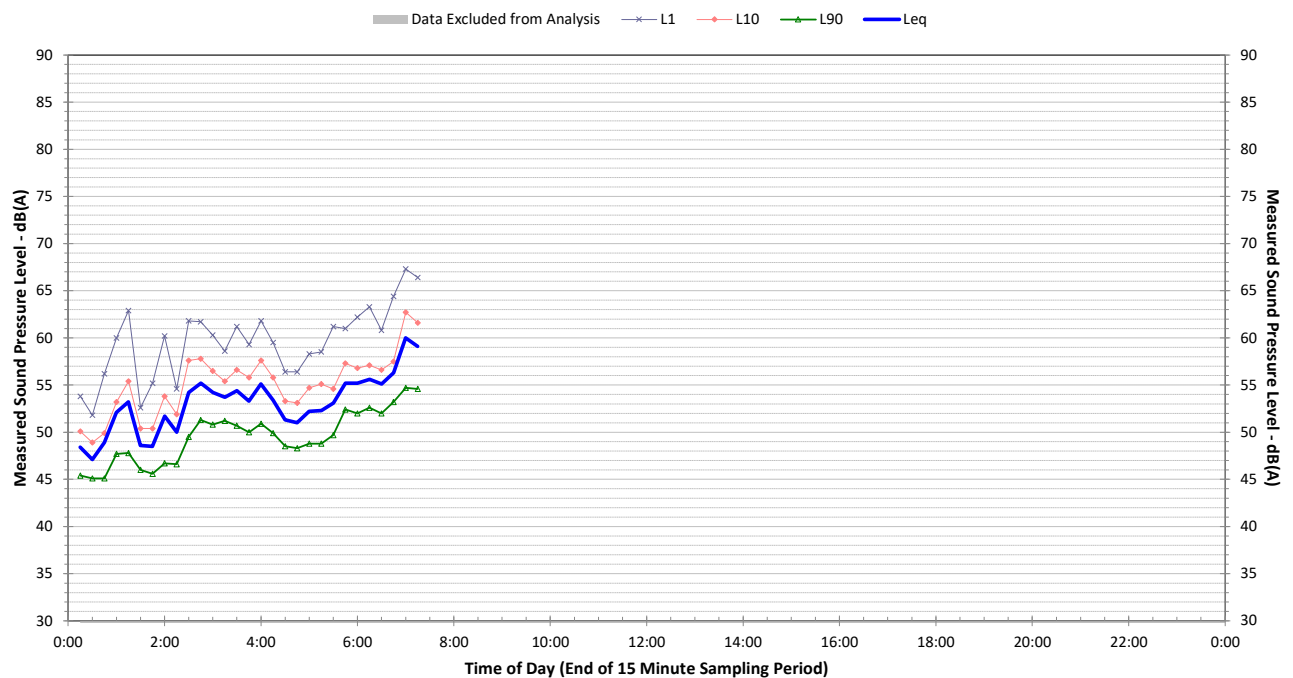


Profile of Noise Environment - Noise Monitoring Location 2 Monday 3 August 2020

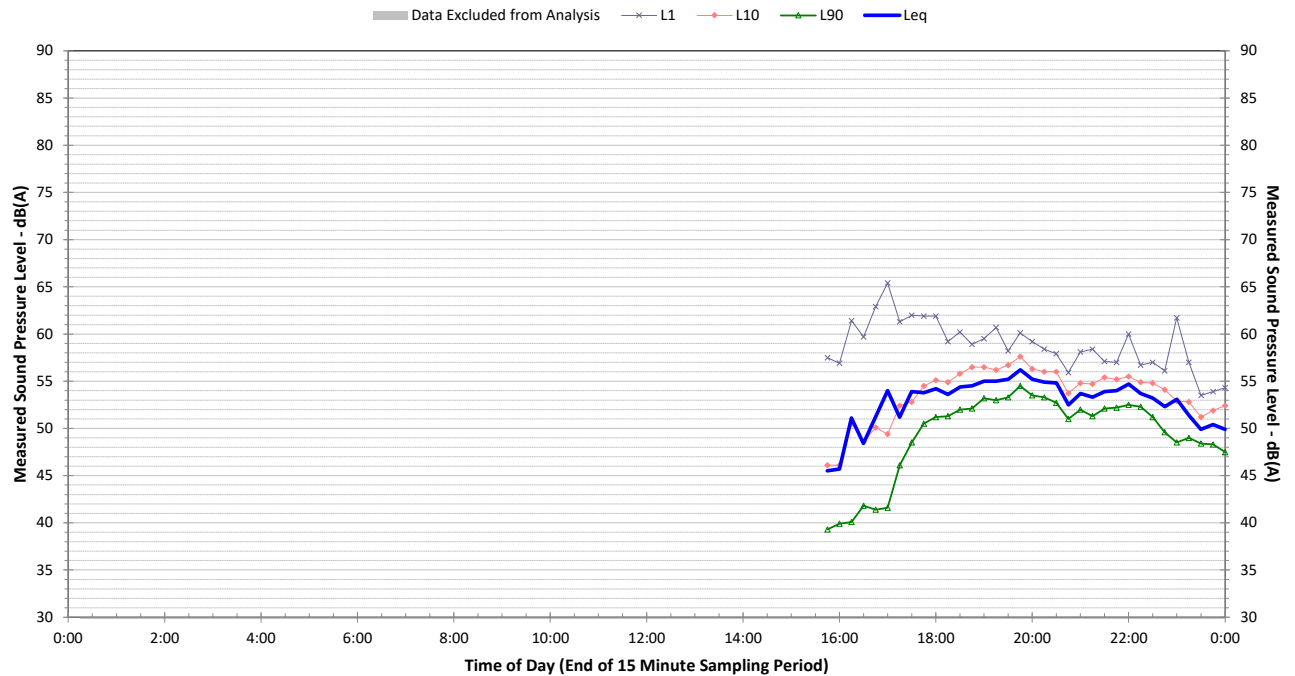


Profile of Noise Environment - Noise Monitoring Location 2 Tuesday 4 August 2020

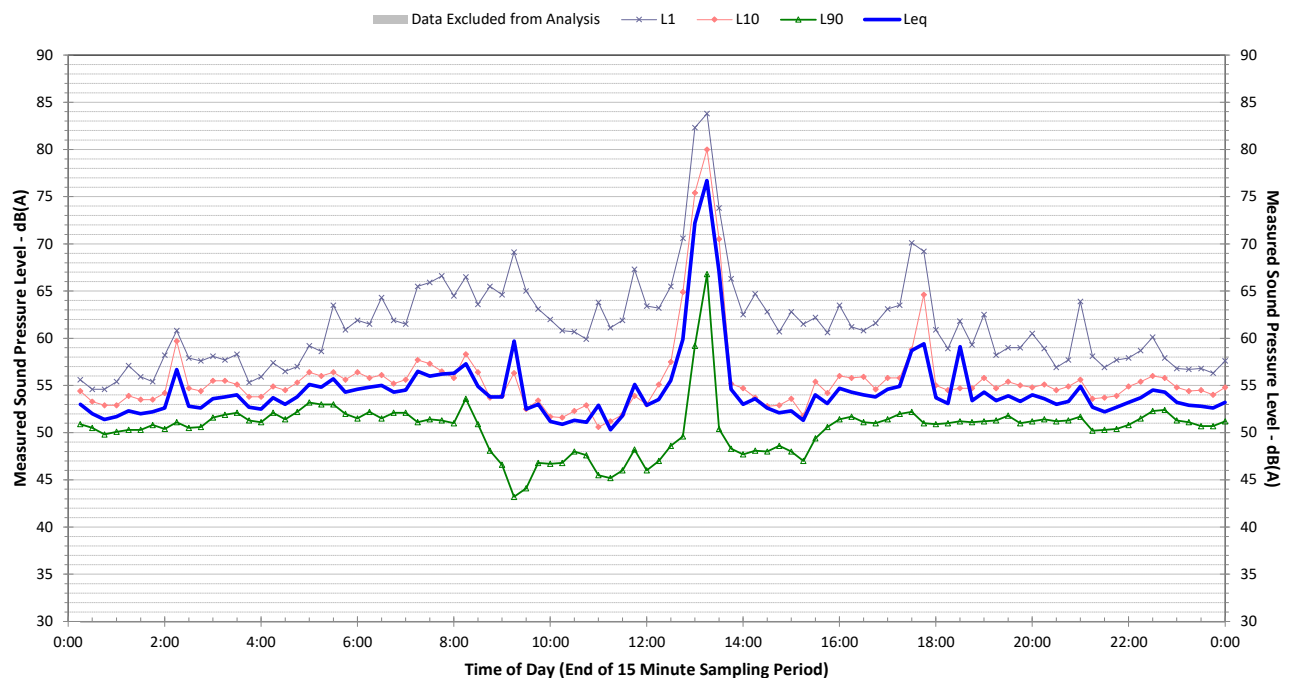


Profile of Noise Environment - Noise Monitoring Location 2 Wednesday 5 August 2020

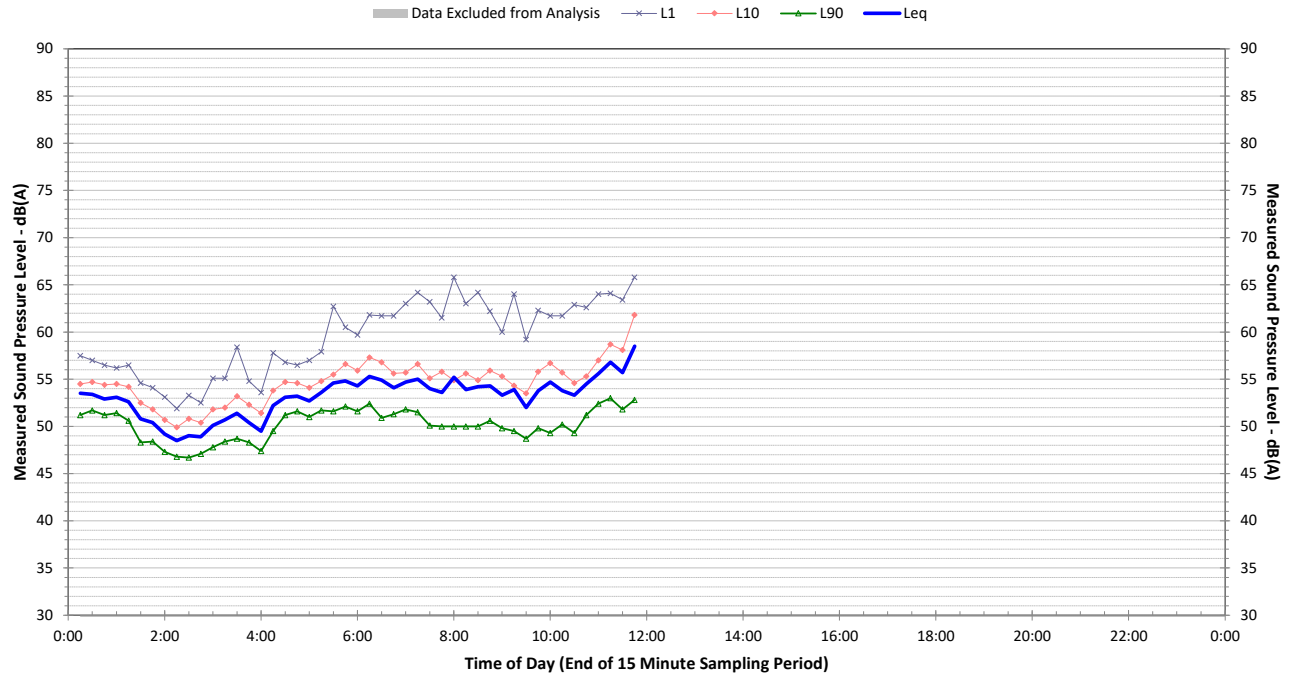


Profile of Noise Environment - Noise Monitoring Location 4 Monday 3 August 2020

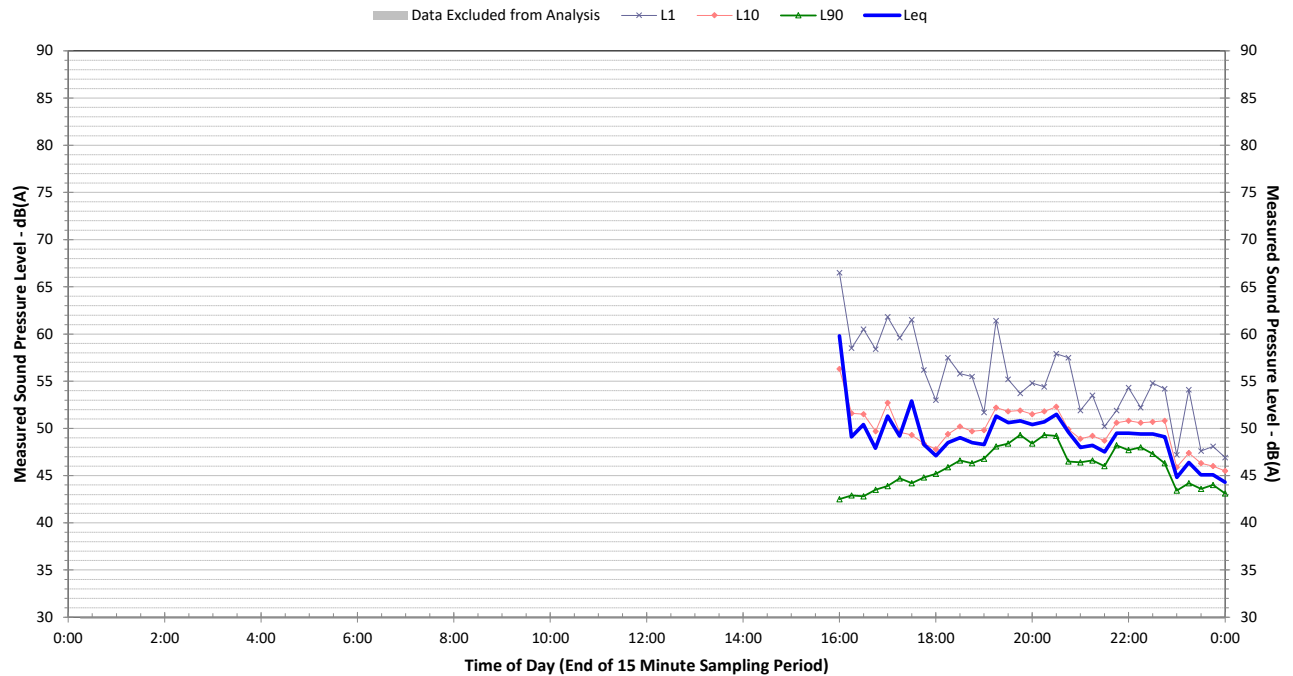


Profile of Noise Environment - Noise Monitoring Location 4 Tuesday 4 August 2020

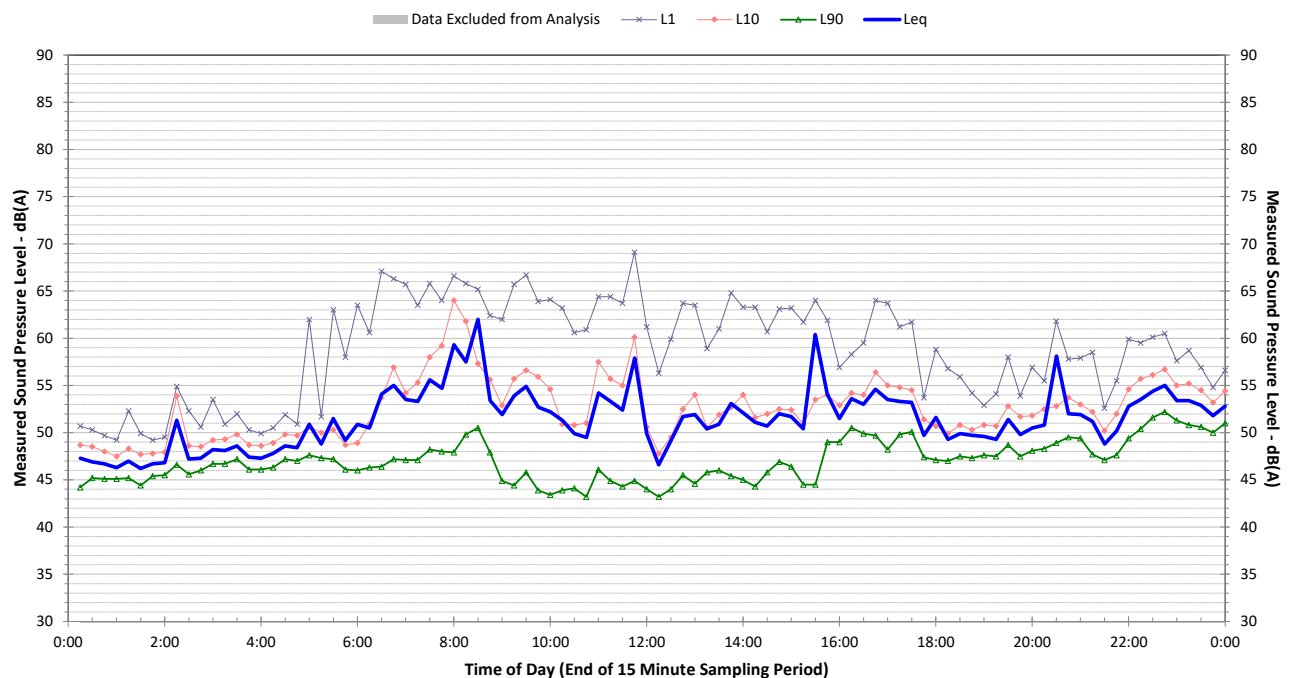


Profile of Noise Environment - Noise Monitoring Location 4 Wednesday 5 August 2020

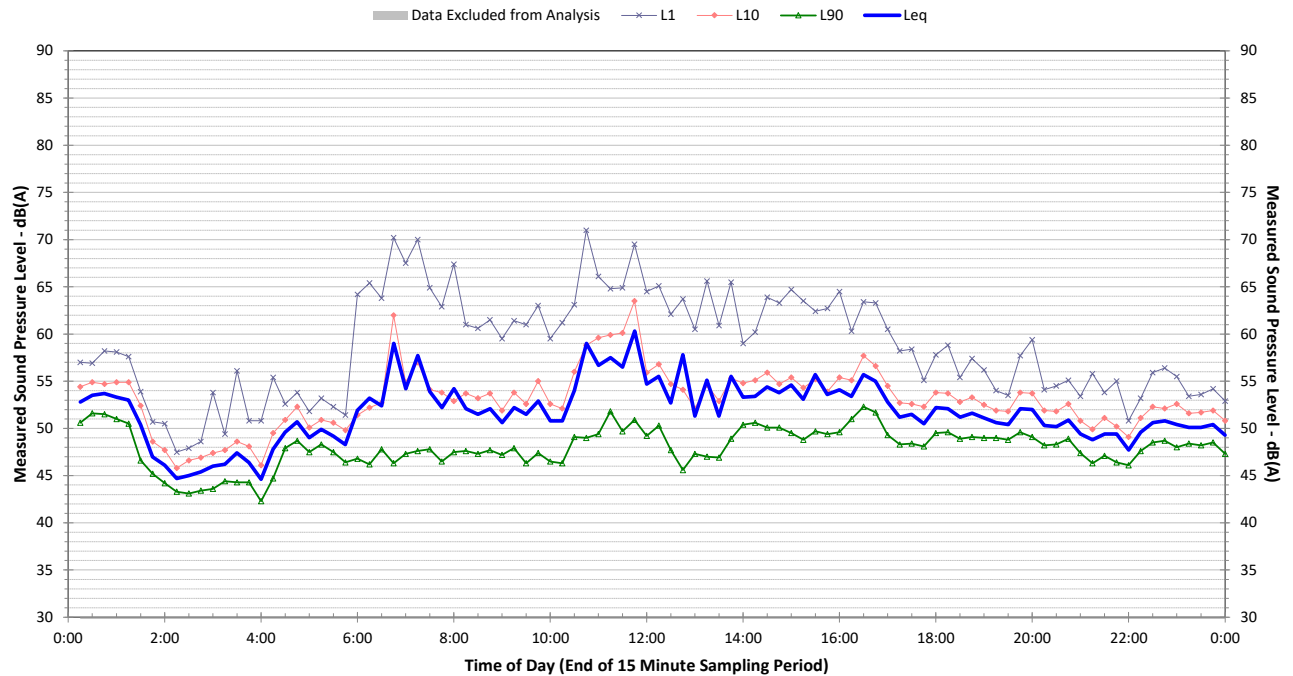


Profile of Noise Environment - Noise Monitoring Location 4 Thursday 6 August 2020

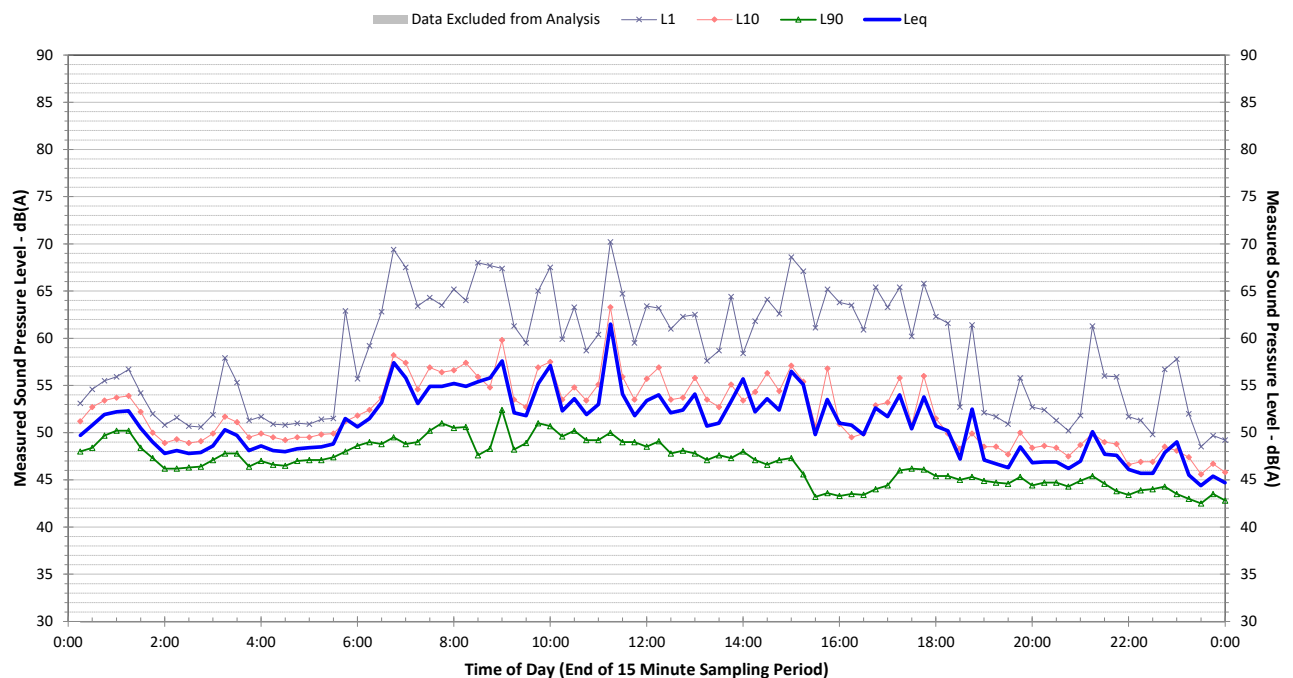


Profile of Noise Environment - Noise Monitoring Location 4 Friday 7 August 2020

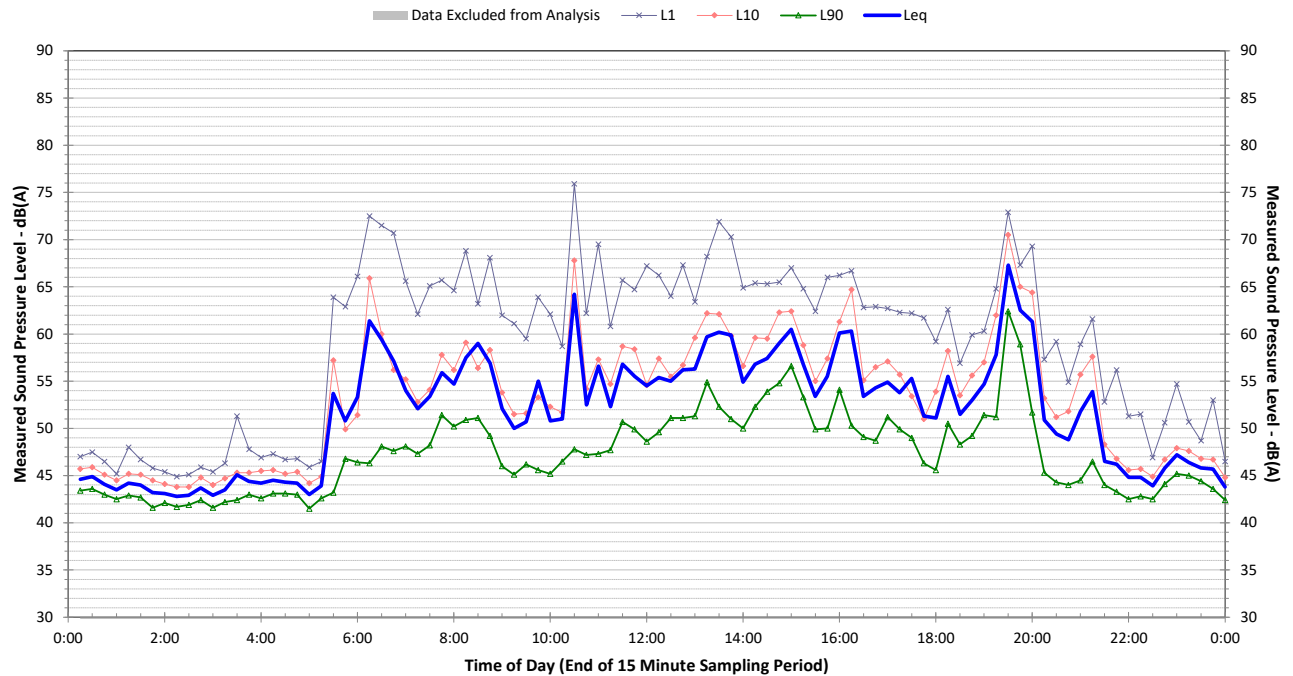


Profile of Noise Environment - Noise Monitoring Location 4 Saturday 8 August 2020

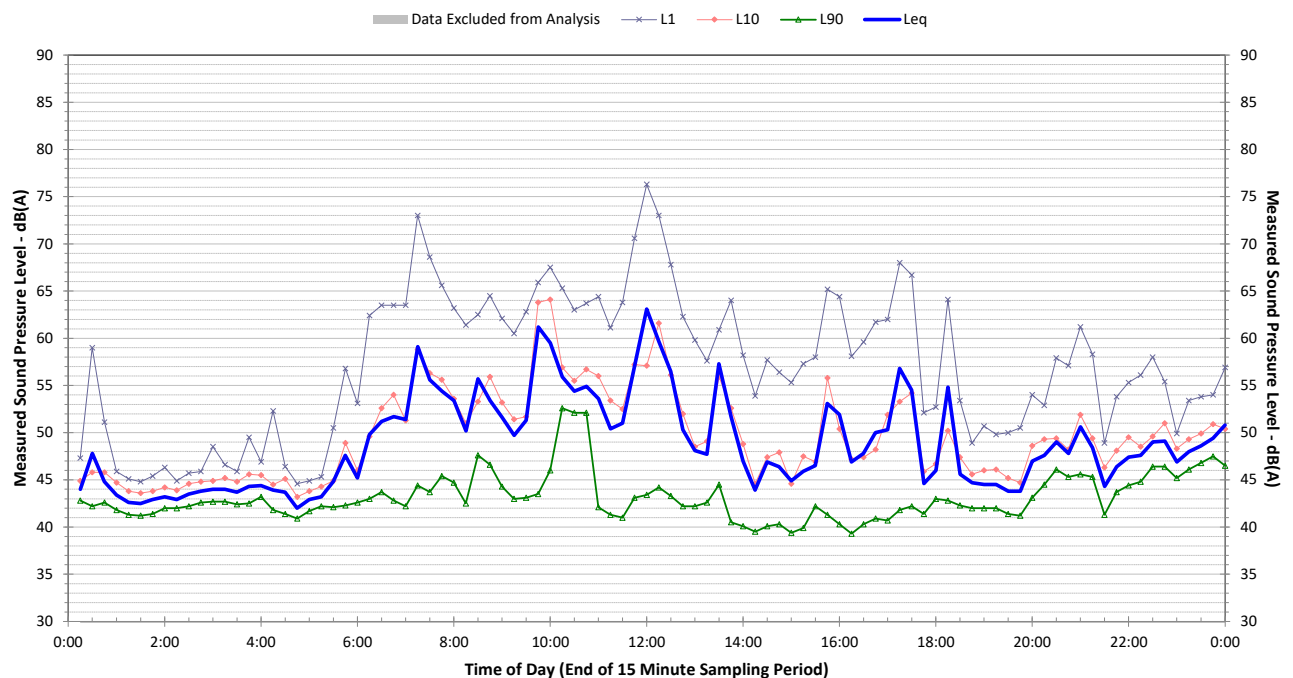


Profile of Noise Environment - Noise Monitoring Location 4 Sunday 9 August 2020

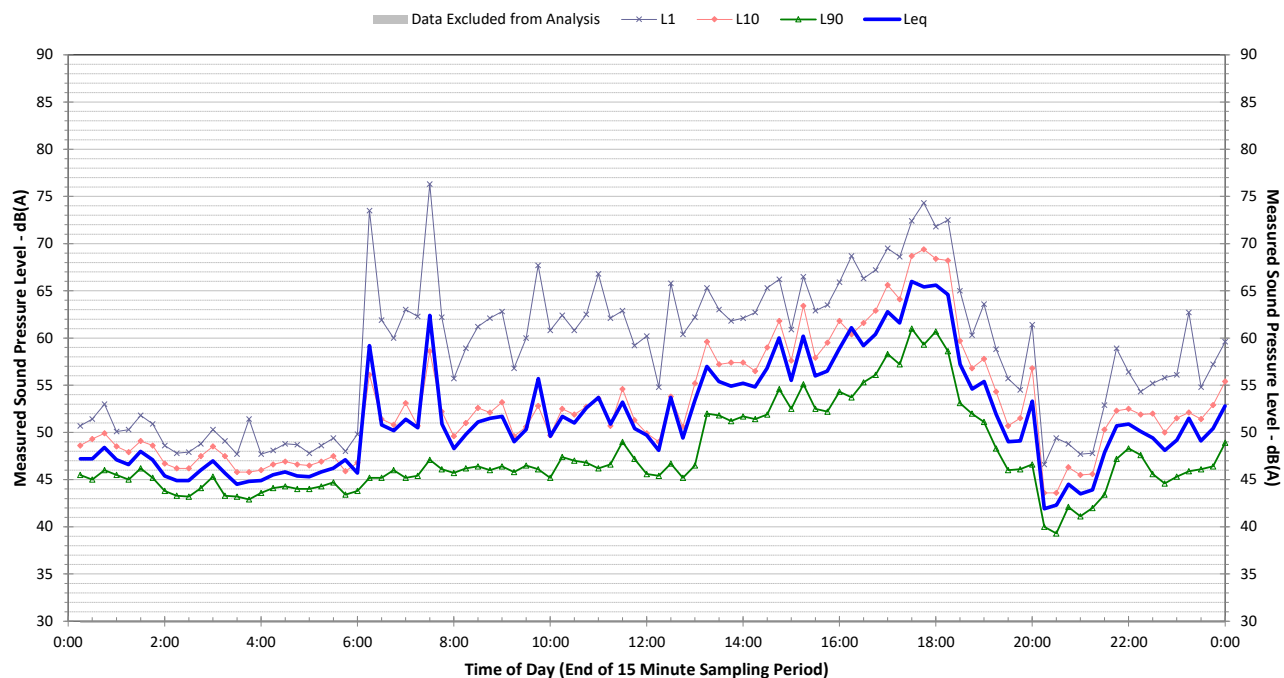


Profile of Noise Environment - Noise Monitoring Location 5 Monday 3 August 2020

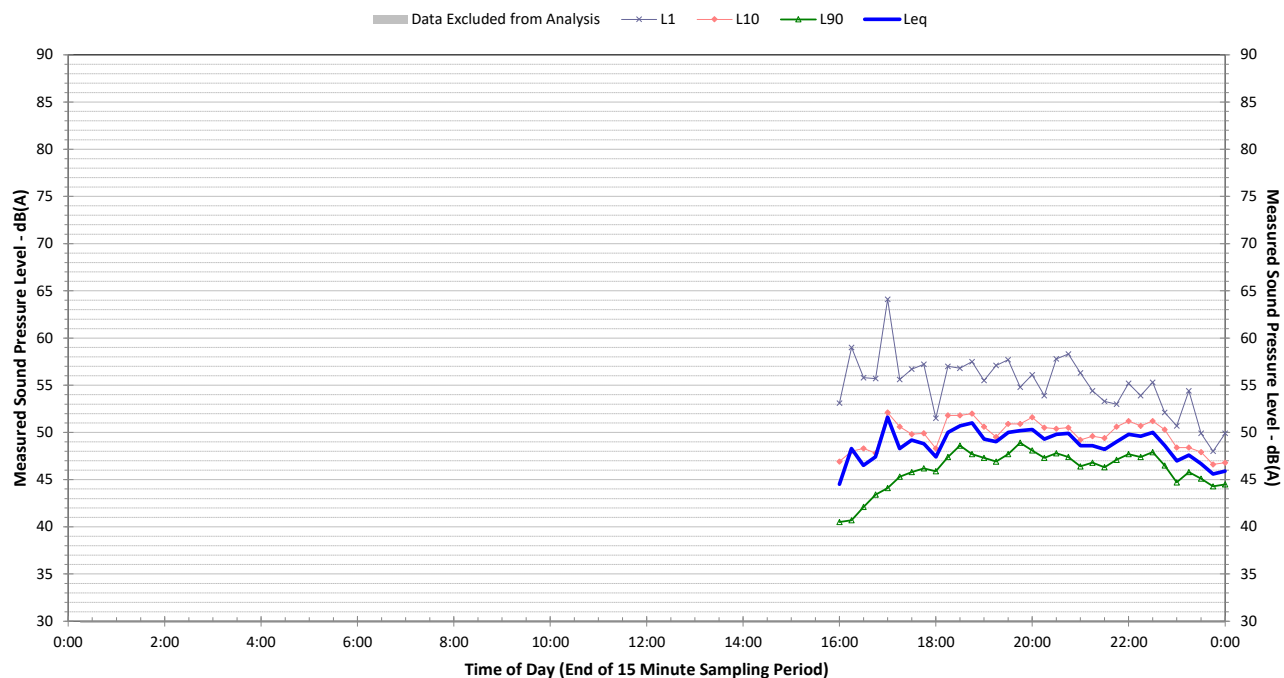


Profile of Noise Environment - Noise Monitoring Location 5 Tuesday 4 August 2020

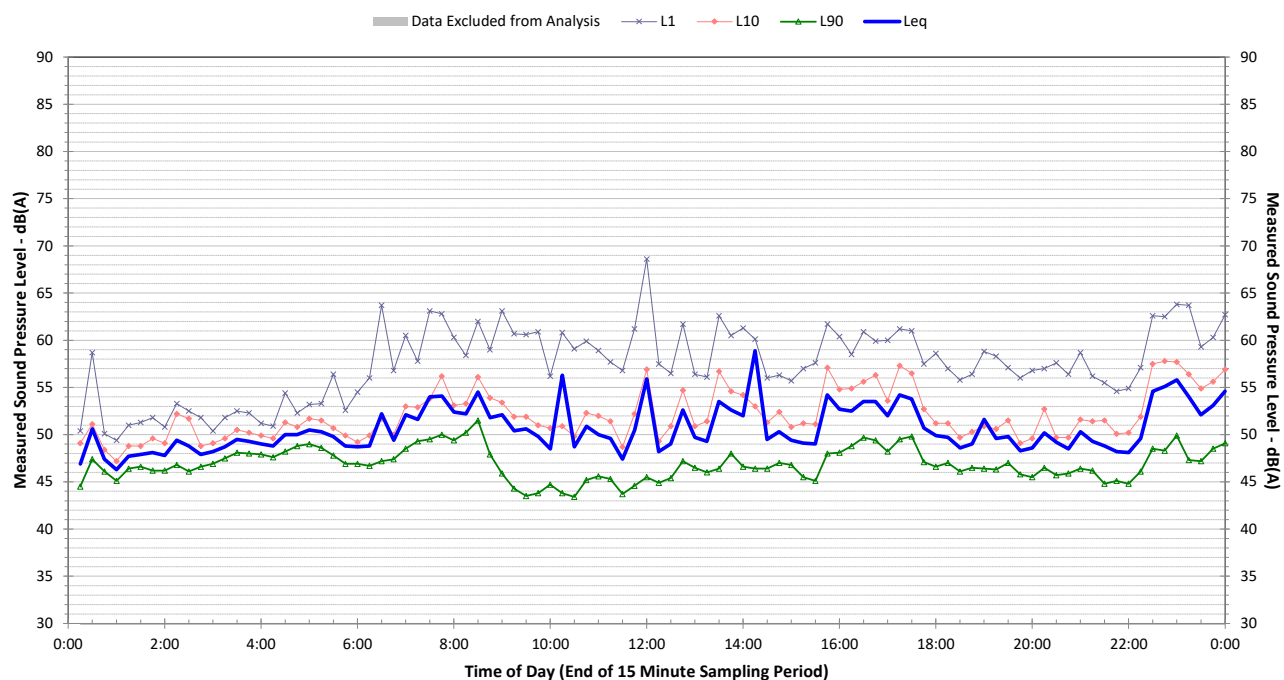


Profile of Noise Environment - Noise Monitoring Location 5 Wednesday 5 August 2020

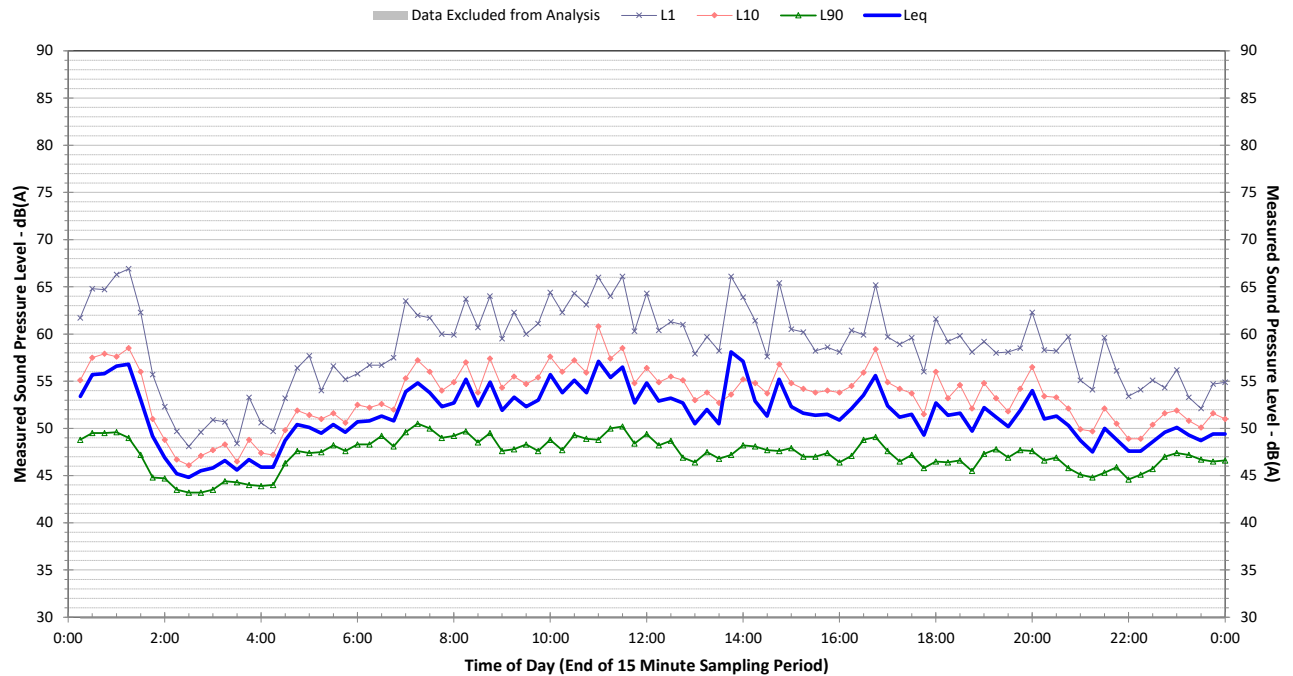


Profile of Noise Environment - Noise Monitoring Location 5 Thursday 6 August 2020

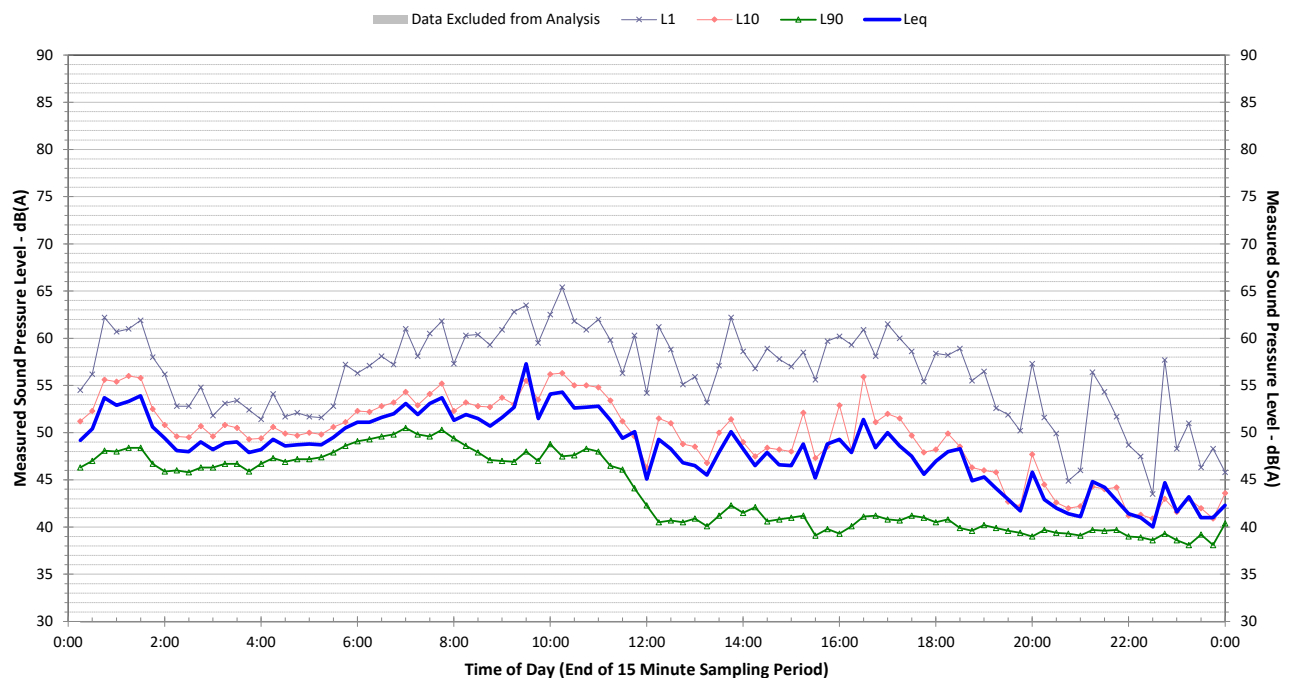


Profile of Noise Environment - Noise Monitoring Location 5 Friday 7 August 2020

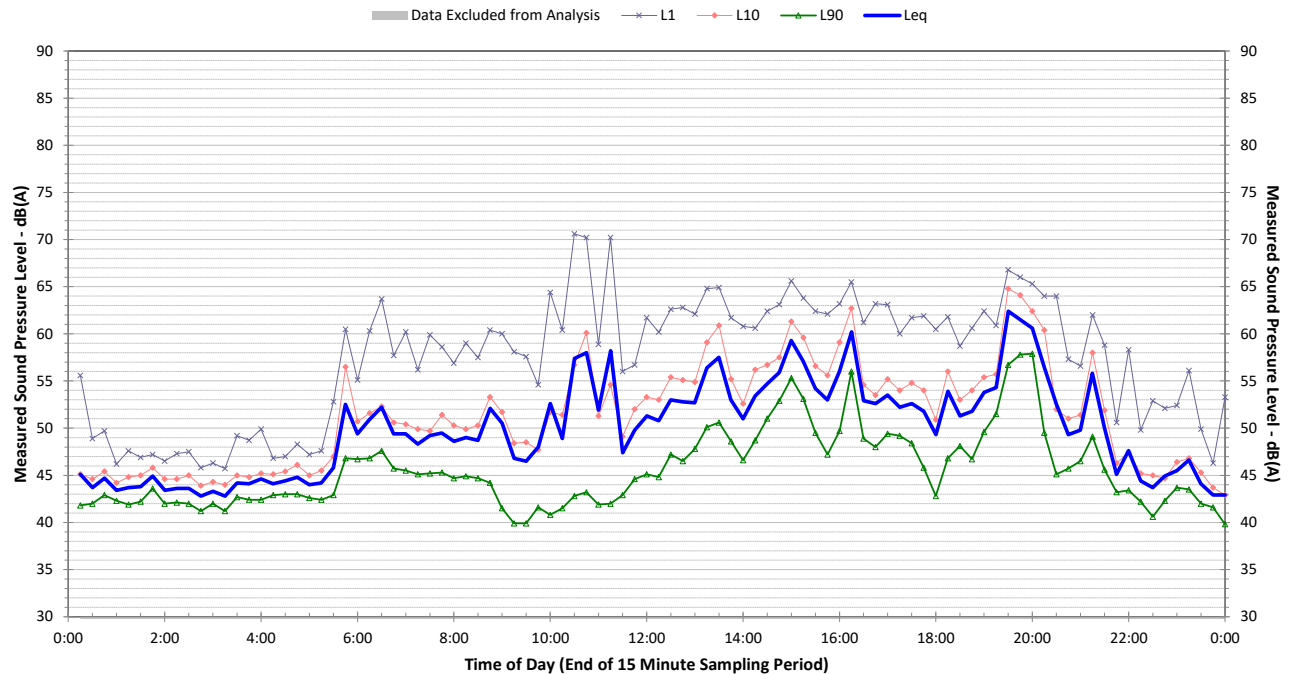


Profile of Noise Environment - Noise Monitoring Location 5 Saturday 8 August 2020

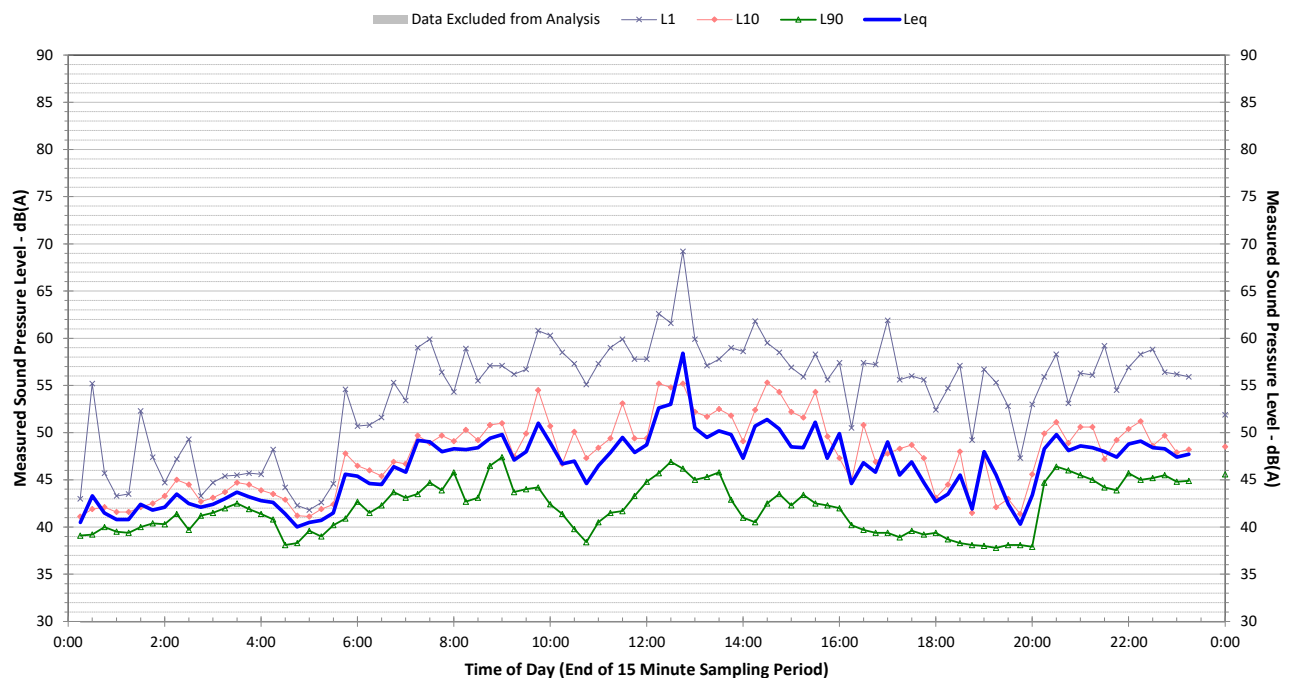


Profile of Noise Environment - Noise Monitoring Location 6 Monday 3 August 2020

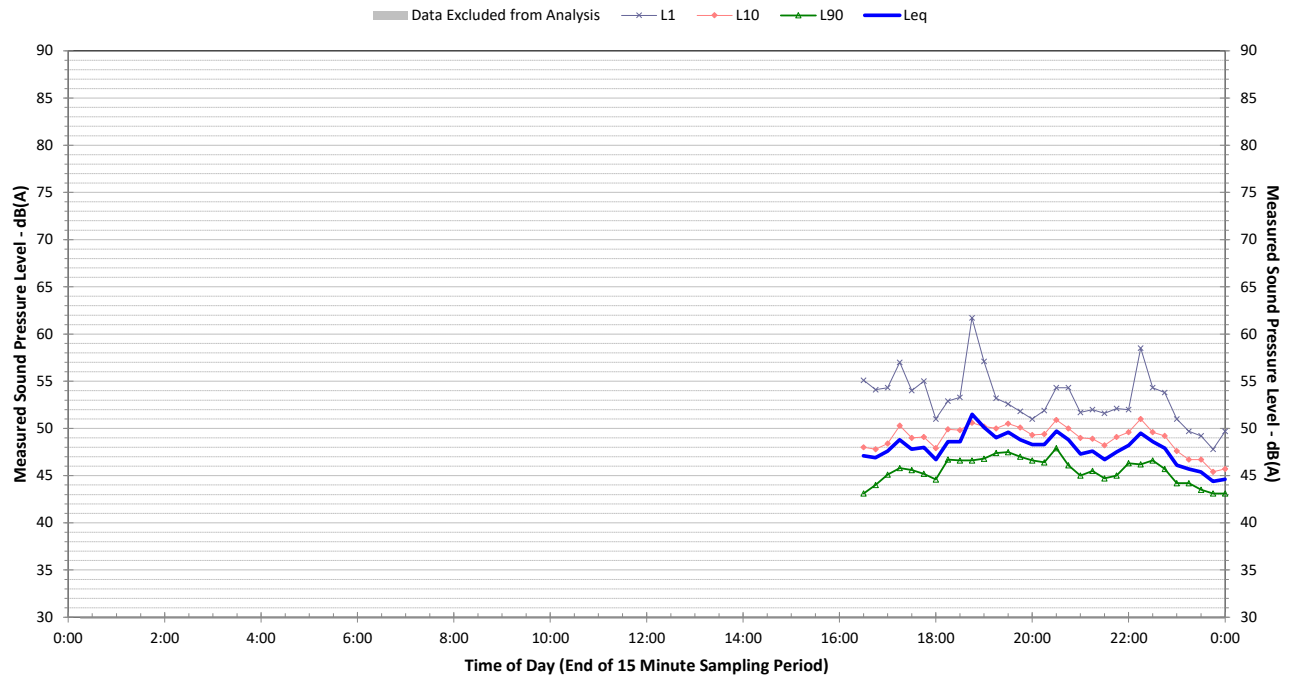


Profile of Noise Environment - Noise Monitoring Location 6 Tuesday 4 August 2020

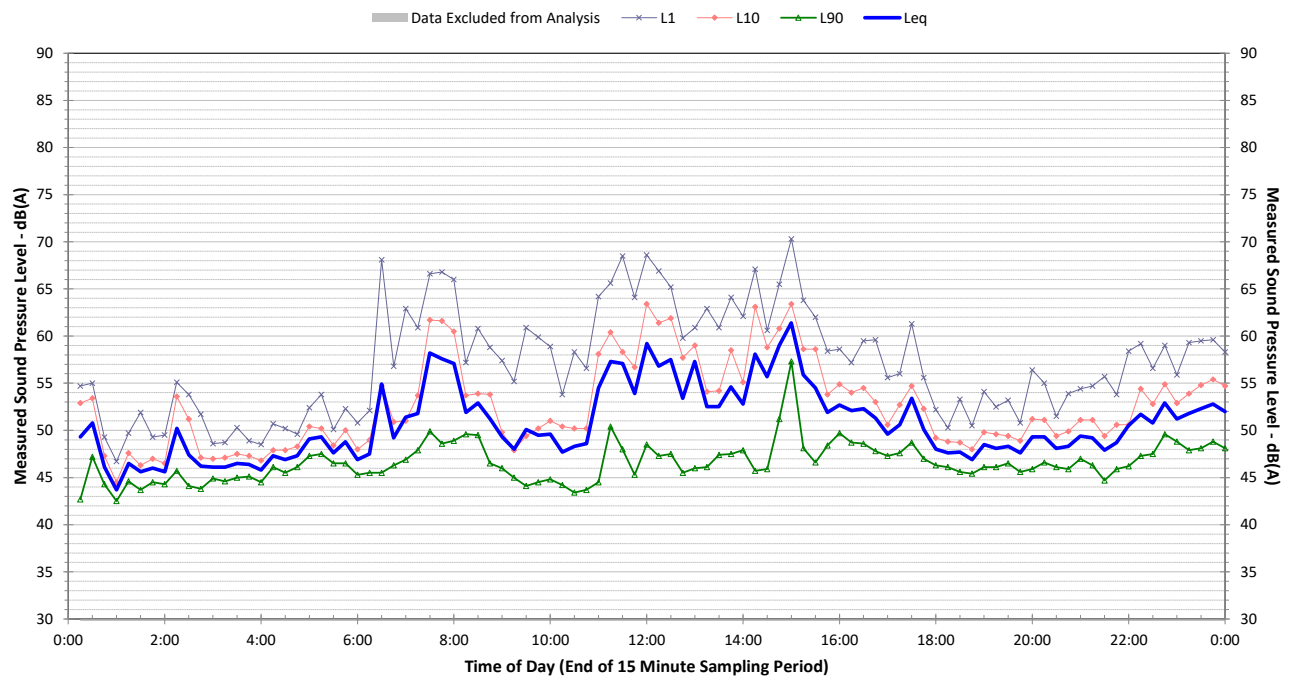


Profile of Noise Environment - Noise Monitoring Location 6 Wednesday 5 August 2020

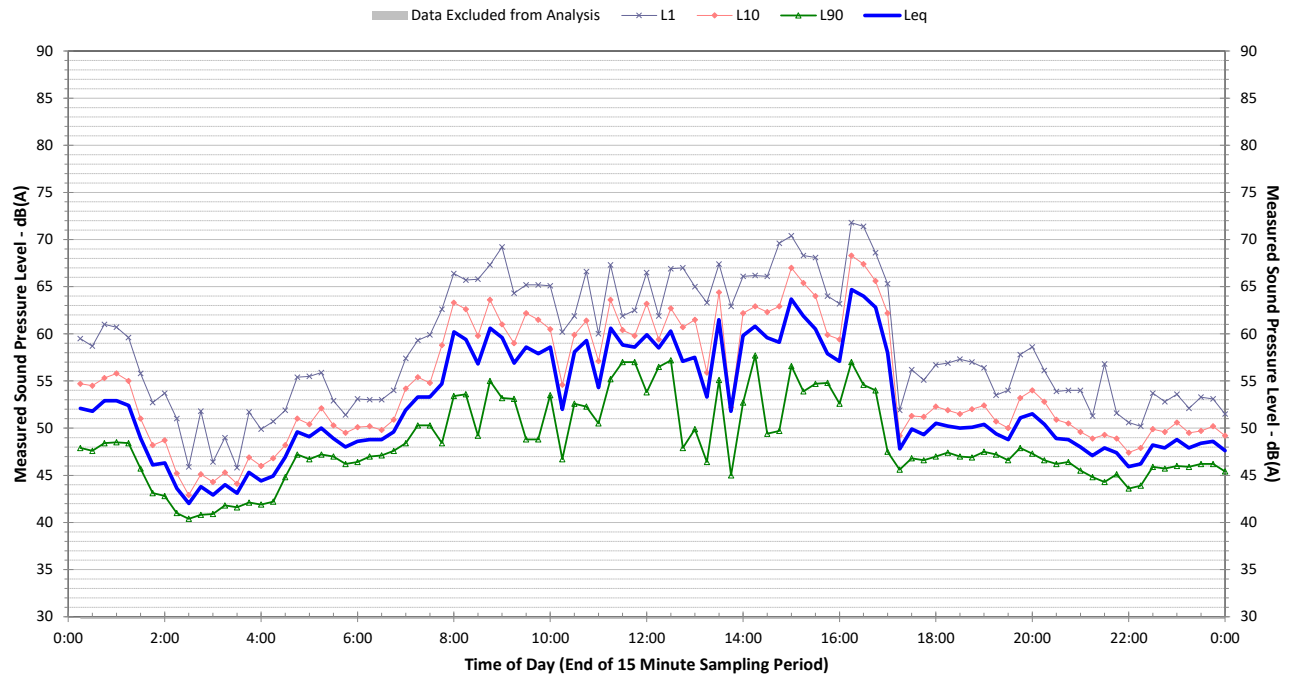


Profile of Noise Environment - Noise Monitoring Location 6 Thursday 6 August 2020

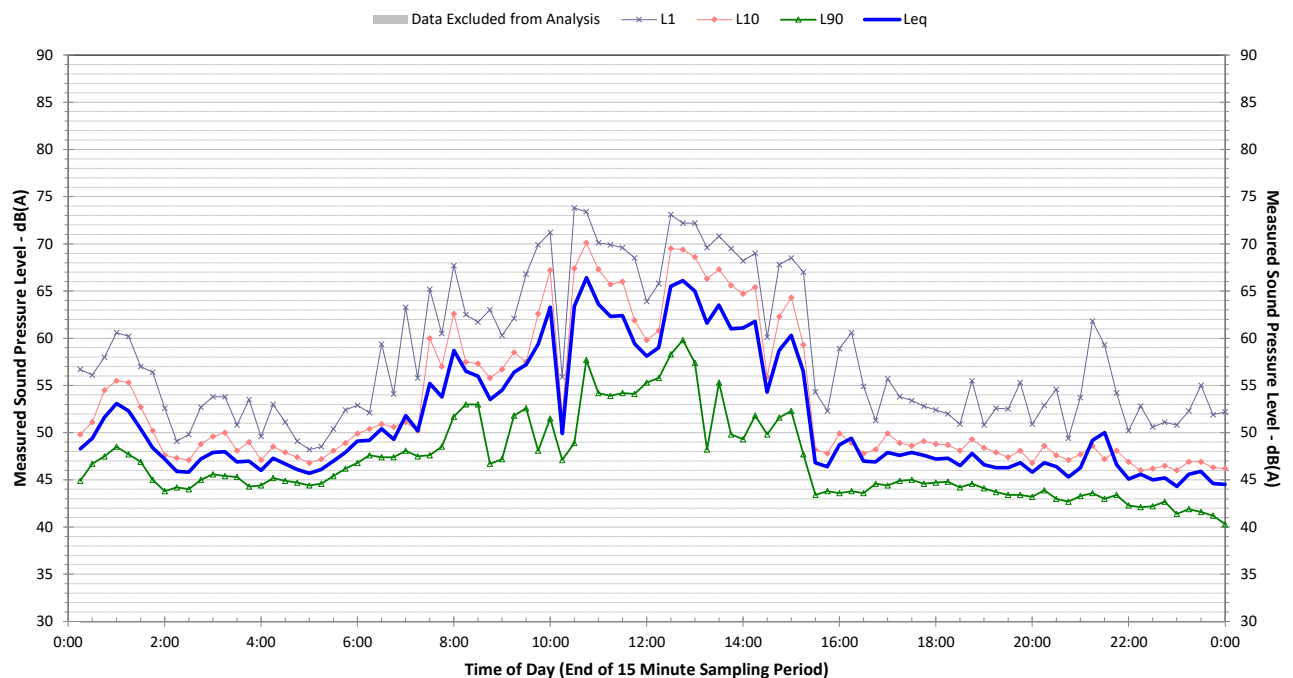


Profile of Noise Environment - Noise Monitoring Location 6 Friday 7 August 2020

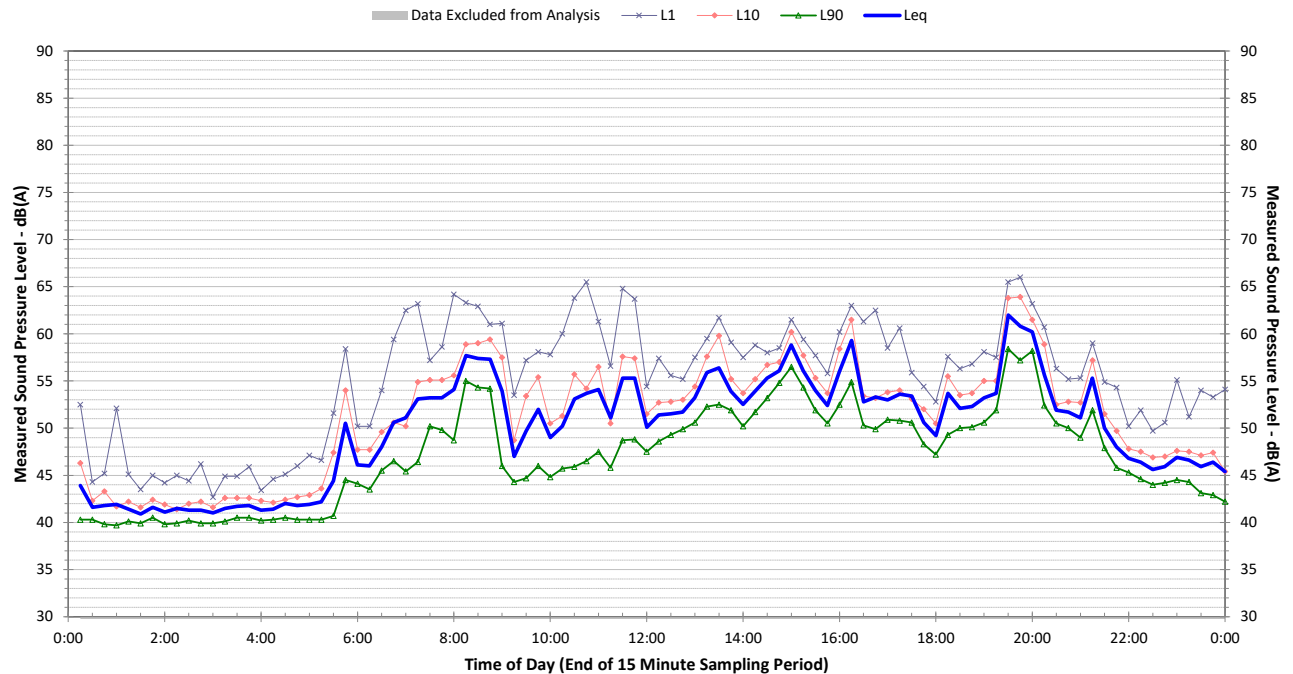

Profile of Noise Environment - Noise Monitoring Location 6 Saturday 8 August 2020

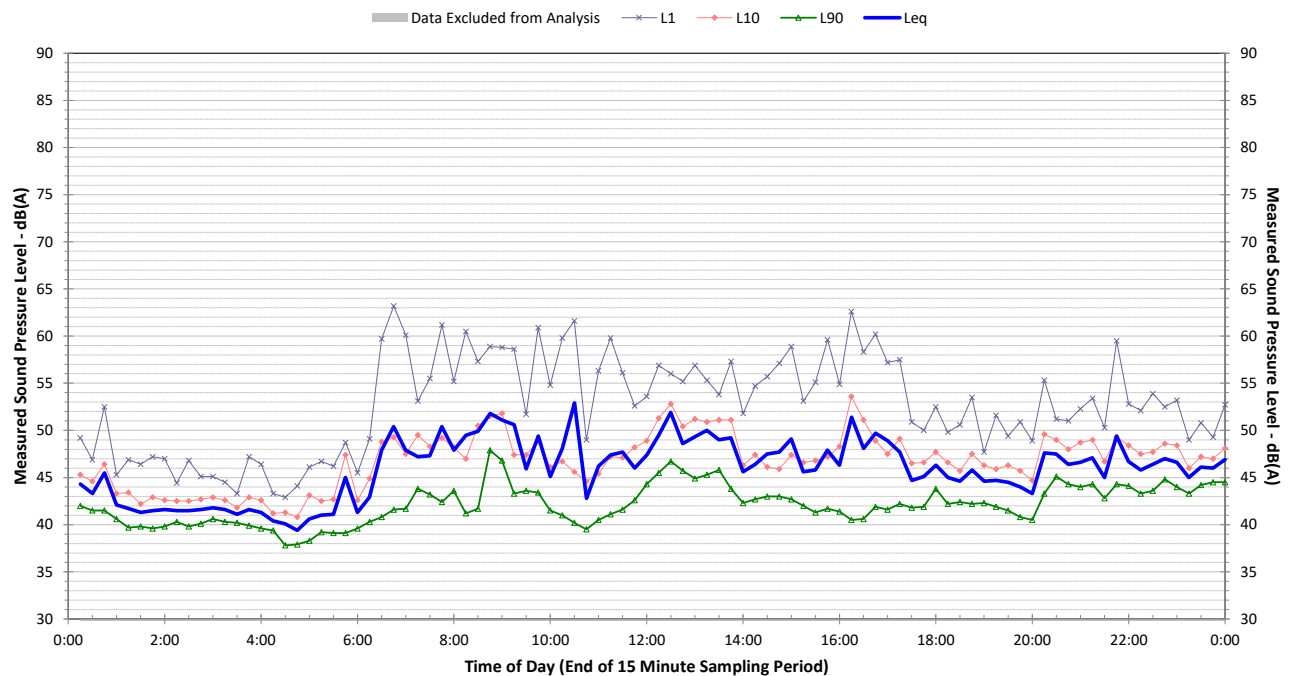

Profile of Noise Environment - Noise Monitoring Location 6 Sunday 9 August 2020

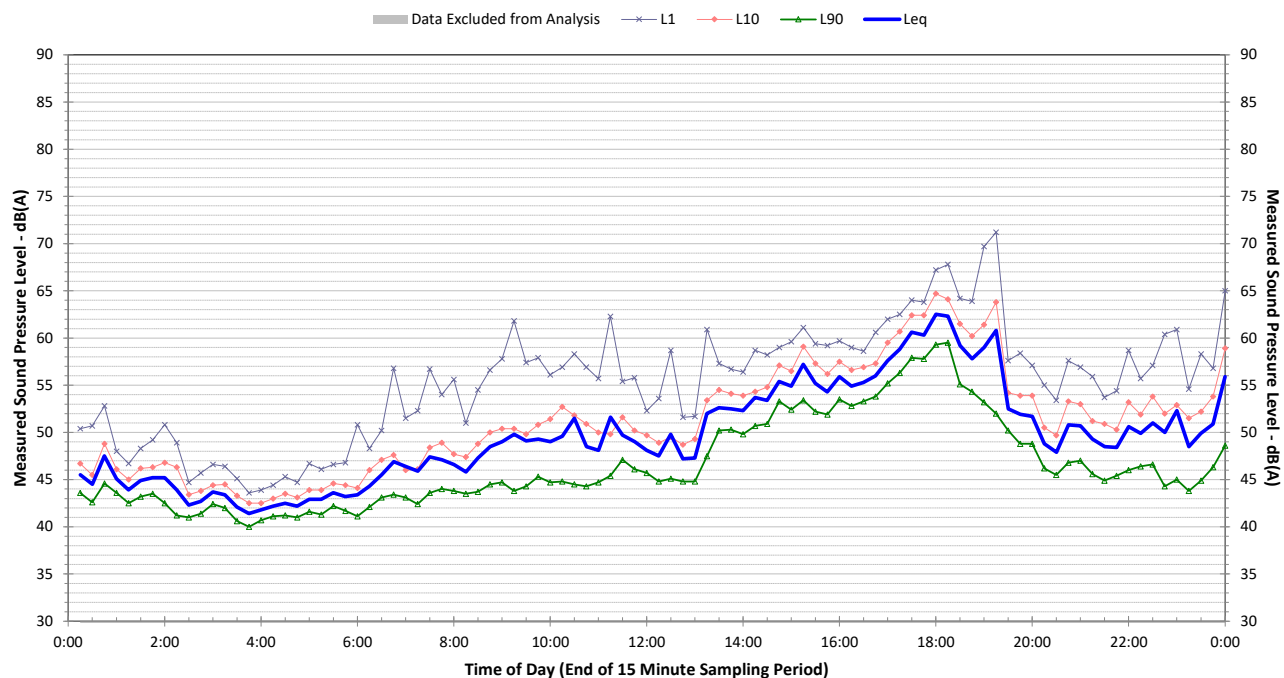

hutchison weller

Hutchison Weller Pty Ltd
ABN 34 603 174 518
Level 1, 357 Military Road, Mosman NSW 2088
www.hutchisonweller.com